

MONTAGERAIL
30/28x1.75 VERZINKT



Zinc
Plated

28x30x1.75 mm

Description

The fixing rail is used for the fixing of pipe and air conditioning distribution systems and electric paths.

Fixing rails are designed for indoor installation.

For outdoor installation it is necessary to choose the surface coating of hot dip galvanizing or stainless steel.


Advantages:

- The fixing rail can be fixed in many different ways to walls, ceilings and floors thanks to different geometry of openings.
- A wide range of accessories is offered for the fixing of the fixing rails.

Technical data

- Surface coating: electro zinc plated steel




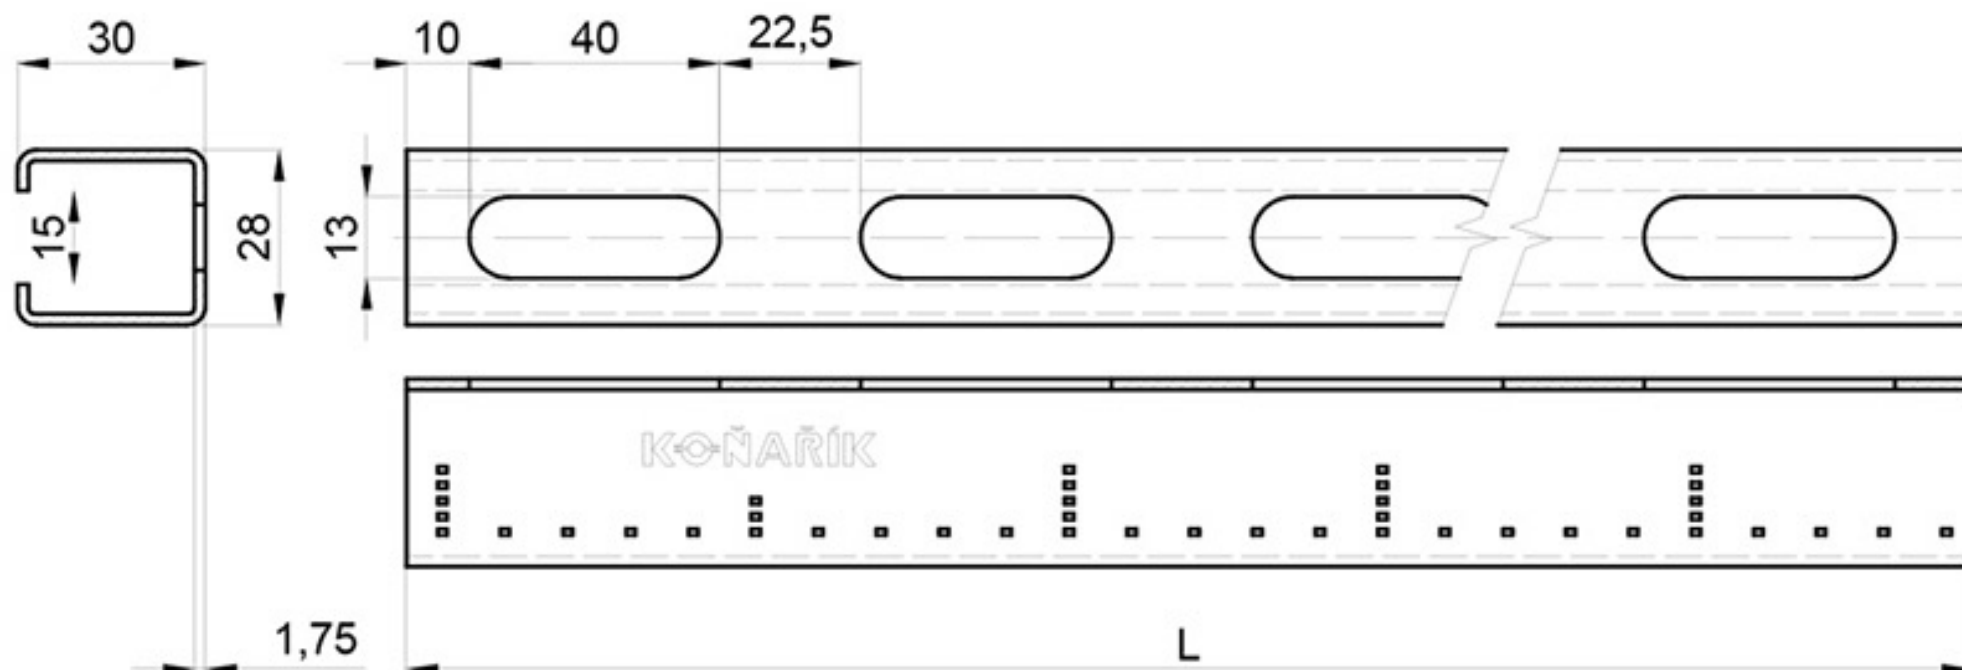

Fabr. Partnr.	WT ARTIKELNUMMER			Afmetingen in MM				Materiaal	Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack	Lengte	Breedte	Hoogte	Dikte		I-pack/pcs		R-pack/pcs		S-pack/pcs	
									Pack	Carton	Pack	Carton	Pack	Carton
31283020	IRVCIZ2-28302000-006		IRVCSWT-P283017M2000	2000	28	30	1.75	Verzinkt	6	60			12x1	120x1
31283030	IRVCIZ2-28303000-006			3000	28	30	1.75	Verzinkt	6	60				
31283060	IRVCIZ2-28306000-001			6000	28	30	1.75	Verzinkt	1	10				


Load values for the fixing rails

Uniform load

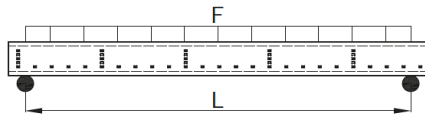


L (mm)	Fixing rail 28/30 F (N)
250	5 542
300	4 618
350	3 960
400	3 462
450	3 078
500	2 770
600	2 308
700	1 978
800	1 726
900	1 538
1000	1 383
1200	1 153
1400	932
1600	715
1800	565
2000	458
2250	360
2500	289
2750	240
3000	201
3250	172
3500	147
3750	128
4000	111
4250	99

Load at 1 point

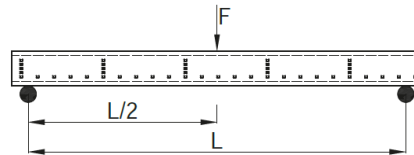


L (mm)	Fixing rail 28/30 F (N)
250	2 771
300	2 310
350	1 980
400	1 731
450	1 539
500	1 385
600	1 153
700	990
800	865
900	770
1000	692
1200	575
1400	493
1600	431
1800	352
2000	285
2250	226
2500	181
2750	150
3000	126
3250	107

Equal concentrated loads at 2 points

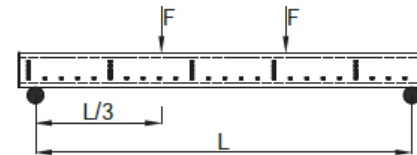

L (mm)	Fixing rail 28/30 F (N)
250	2 079
300	1 731
350	1 485
400	1 299
450	1 153
500	1 038
600	865
700	740
800	648
900	575
1000	518
1200	430
1400	340
1600	261
1800	205
2000	166
2250	130
2500	105


Equal concentrated loads at 3 points

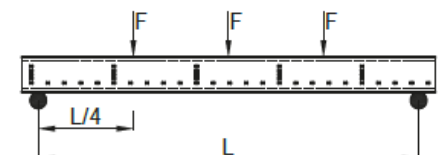

L (mm)	Fixing rail 28/30 F (N)
250	1 385
300	1 151
350	990
400	865
450	770
500	692
600	575
700	496
800	431
900	382
1000	346
1200	288
1400	245
1600	187
1800	144
2000	120

10 N = 1 kg

How to use :

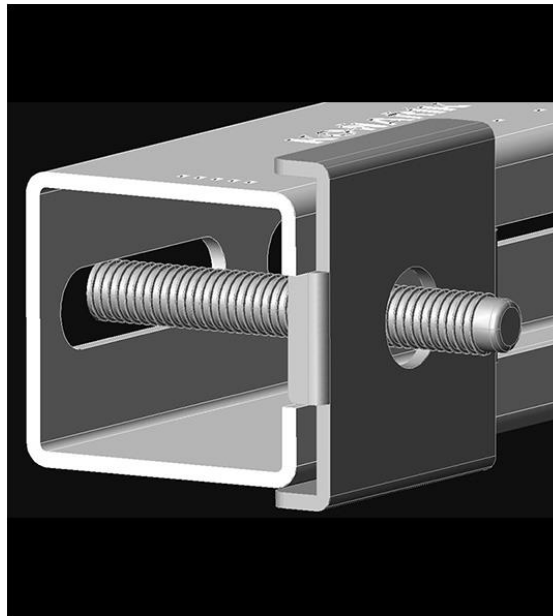


GEBRUIK DEZE BEVESTIGINGSMATERIALEN :



MONTAGESET



27/18+28/30



**Voor
M8**