

MONTAGERAIL
38/40x2.00 VERZINKT



Zinc
Plated

38x40x2.00 mm

Description

The fixing rail is used for the fixing of pipe and air conditioning distribution systems and electric paths.

Fixing rails are designed for indoor installation.

For outdoor installation it is necessary to choose the surface coating of hot dip galvanizing or stainless steel.


Advantages:

- The fixing rail can be fixed in many different ways to walls, ceilings and floors thanks to different geometry of openings.
- A wide range of accessories is offered for the fixing of the fixing rails.

Technical data

- Surface coating: electro zinc plated steel



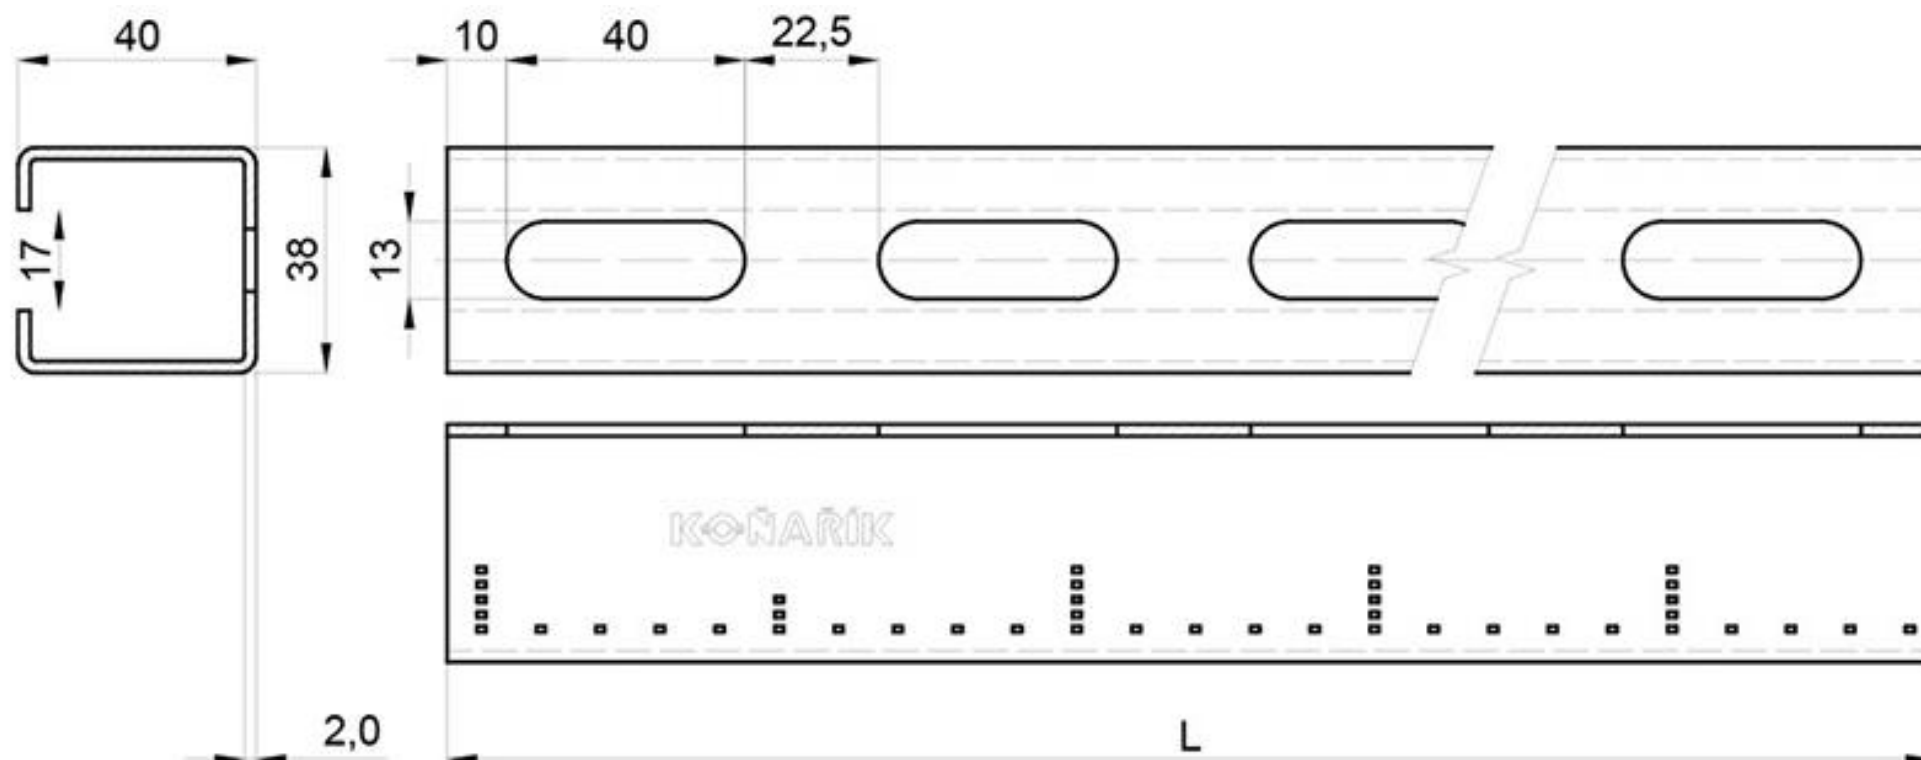


Fabr. Partnr.	WT ARTIKELNUMMER			Afmetingen in MM				Materiaal	Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack	Lengte	Breedte	Hoogte	Dikte		I-pack/pcs Pack Carton		R-pack/pcs Pack Carton		S-pack/pcs Pack Carton	
31384020	IRVCIZ3-38402000-004		IRVCSWT-P384020M2000	2000	38	40	2	Verzinkt	4	40			4X1	40X1
31384030	IRVCIZ3-38403000-004			3000	38	40	2	Verzinkt	4	40				
31384060	IRVCIZ3-38406000-001			6000	38	40	2	Verzinkt	1	10				

Load values for the fixing rails


10 N = 1 kg

Uniform load




L (mm)	Nosník 38/40 Fixing rail 38/40 F (N)
250	11 498
300	9 602
350	8 222
400	7 197
450	6 401
500	5 763
600	4 799
700	4 113
800	3 594
900	3 200
1000	3 878
1200	2 396
1400	2 051
1600	1 794
1800	1 522
2000	1 238
2250	973
2500	790
2750	651
3000	548
3250	462
3500	399
3750	348
4000	305
4250	270
4500	241
4750	218
5000	196
5250	174
5500	161
5750	145
6000	133

Load at 1 point

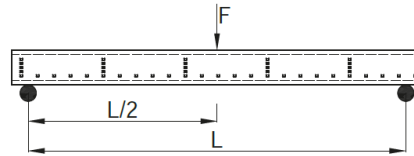


L (mm)	Nosník 38/40 Fixing rail 38/40 F (N)
250	5 766
300	4 804
350	4 118
400	3 601
450	3 200
500	2 881
600	2 400
700	2 058
800	1 800
900	1 600
1000	1 439
1200	1 199
1400	1 028
1600	900
1800	799
2000	717
2250	610
2500	494
2750	407
3000	341
3250	290
3500	251
3750	217
4000	190
4250	171
4500	149
4750	135
5000	121
5250	110
5500	100

Equal concentrated loads at 2 points

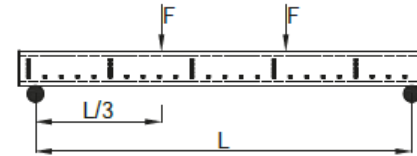



L (mm)	Nosník 38/40 Fixing rail 38/40 F (N)
250	4 324
300	3 600
350	3 088
400	2 700
450	2 400
500	2 161
600	1 799
700	1 541
800	1 347
900	1 198
1000	1 078
1200	897
1400	770
1600	673
1800	549
2000	451
2250	355
2500	289
2750	237
3000	200
3250	169
3500	145
3750	127
4000	111
4250	99

Equal concentrated loads at 3 points

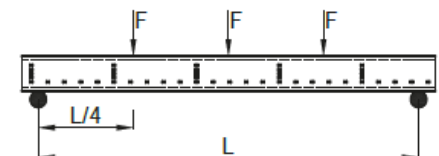

L (mm)	Nosník 38/40 Fixing rail 38/40 F (N)
250	2 880
300	2 401
350	2 058
400	1 800
450	1 599
500	1 440
600	1 199
700	1 027
800	900
900	799
1000	718
1200	598
1400	511
1600	449
1800	399
2000	321
2250	255
2500	207
2750	171
3000	142
3250	121
3500	104


How to use :

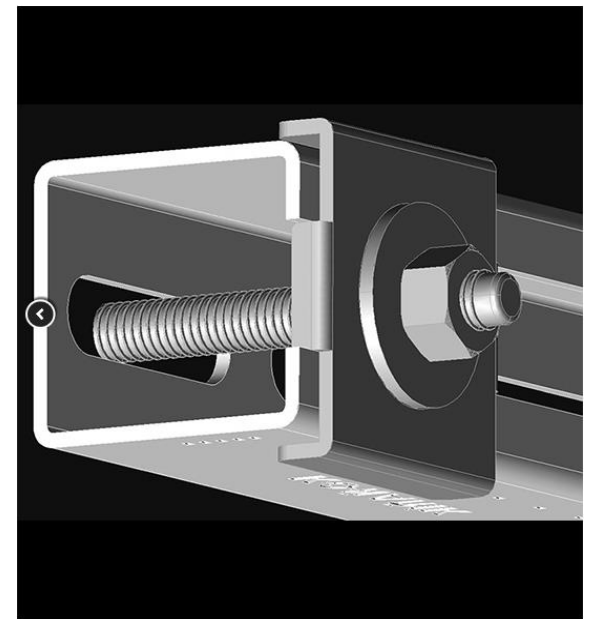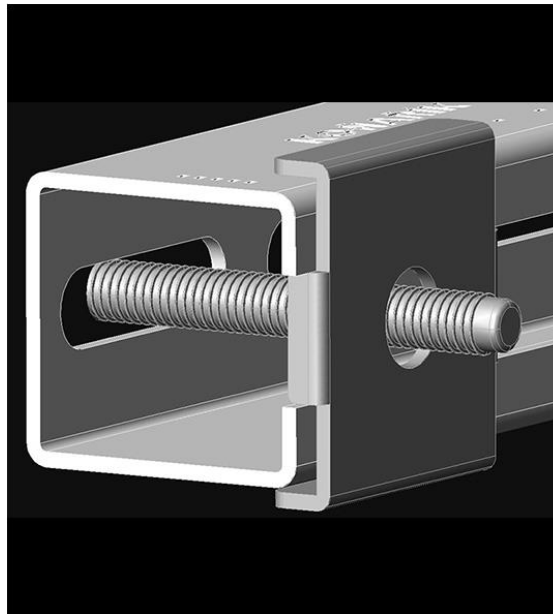

GEBRUIK DEZE BEVESTIGINGSMATERIALEN :



MONTAGESET

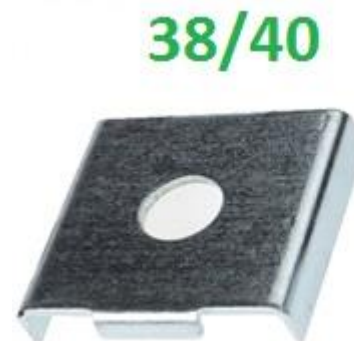

**Voor
M10**