

KOPPELPLATEN VOOR montagerails VERZINKT



Eigenschappen en voordelen :




- The mounting angle is used when it is necessary to make a construction using fixing rails and cantilever arms.

Example: A bearing component for cantilever arms can be set together by means of two 45-degree mounting angles and a piece of a fixing rail. To facilitate the assembly a 45-degree mounting angle is supplied for a fixing rail profile of 38/40 prefabricated with two washers and two screws.

Material :


- Steel of a quality class of 5.6 / Electro zinc plated

Mounting procedure :

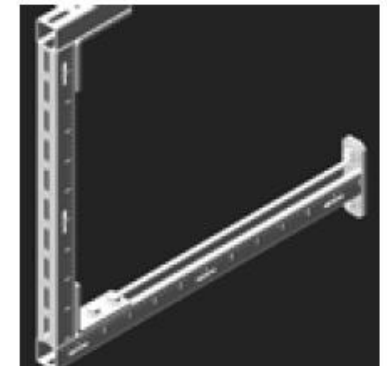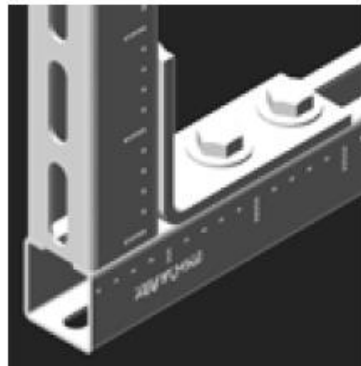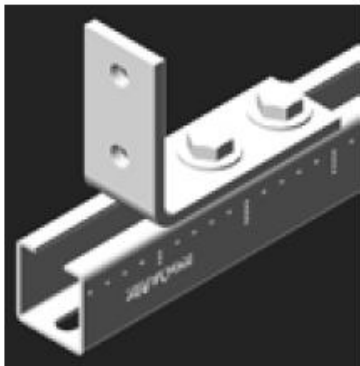


VOOR RAIL 27/18 en 28/30

RECHTE 90° HOEK

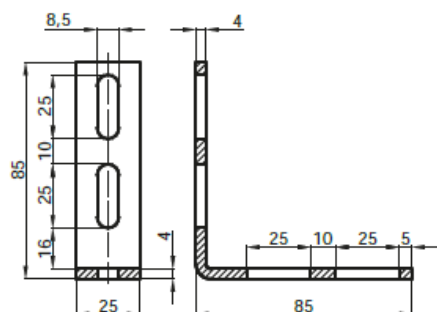


45° hoek

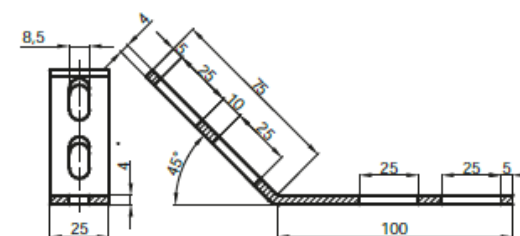


Fabric Partnr.	WT ARTIKELNUMMER			Hoek			Materiaal	Type Rail	Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack		Gaten	Dikte			I-pack/pcs Pack Carton	R-pack/pcs Pack Carton	S-pack/pcs Pack Carton			
37002745	IWVKIZM-02728G45-025			45°		4	4.0 mm	Staal verzinkt	27/18 + 28/30	25	250			
37002790	IWVKIZM-02728G90-025			90°		4	4.0 mm	Staal verzinkt	27/18 + 28/30	25	250			

VOOR RAIL 38/40 en 40/60+STRUT RAILS


RECHTE 90° HOEK

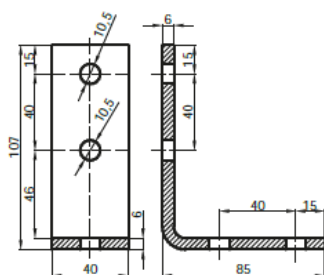

4 GATEN

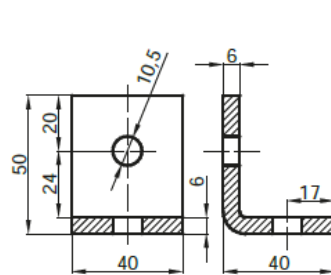


2 GATEN

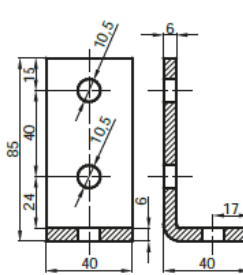

3 GATEN

45° hoek

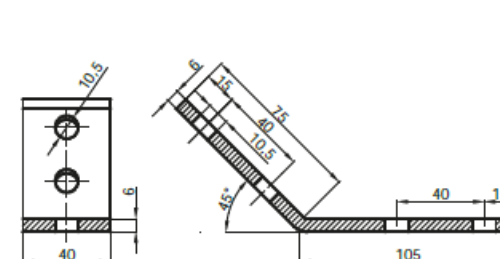

Fabric Partnr.	WT ARTIKELNUMMER			Hoek			Materiaal	Type Rail	Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack		Gaten	Dikte			I-pack/pcs Pack Carton	R-pack/pcs Pack Carton	S-pack/pcs Pack Carton			
37003845	IWVKIZM-S3840G45-010			45°		4	6.0 mm	Staal verzinkt	38/40+40/60+Strut	10	100			
37003890	IWVKIZM-S3840G90-020			90°		4	6.0 mm	Staal verzinkt	38/40+40/60+Strut	20	100			
37004090	IWVKIZM-S3840G92-020			90°		2	6.0 mm	Staal verzinkt	38/40+40/60+Strut	20	200			
37005090	IWVKIZM-S3840G93-020			90°		3	6.0 mm	Staal verzinkt	38/40+40/60+Strut	20	200			