



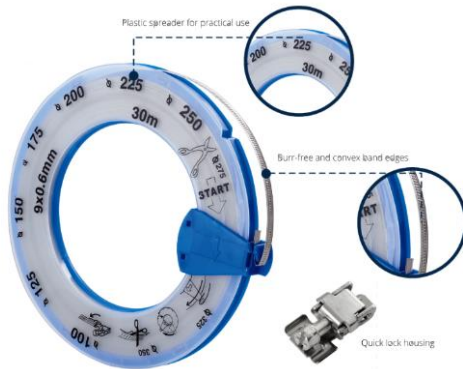

SLANGKLEMBAND OP ROL
GEPERFOREERDE VERSIE in
BANDBREEDTES 8 en 14 MM
VOLLE BAND in 9.0 MM



ENDLESS HOSE CLAMP BAND

Endless perforated banding OR non perforated banding with separate housings is recommended for occasional use in applications with variable diameters. The fact that this clamp comes in rolls of 3m and 30m means that you can clamp diameters which standard clamps cannot cover. There is no need to know the application diameter beforehand as you can adjust the clamp to the diameter required on each occasion. The assembly of this clamp is quick, clean and easy. All you require is a cutting tool and a conventional flat-head screwdriver.

Endless perforated and non perforated band is available in different material qualities, thicknesses and bandwidths in a variety of different presentations. A practical and user-friendly kit in blister pack has been designed which contains 3m of band and 6 or 8 housings depending on the material quality. For bigger jobs 30m rolls are available as well as sturdy boxes each containing 50 housings.

Aanbevolen toepassing : 8.0 / 9mm light duty /14.0 mm medium duty

In weinig corrosie-gevoelige milieu's, in apparaten en motorenbouw. (Vaatwasmachines, verwarmingselementen.....enz).

Schroef blijft onderhevig aan corrosie

Schroef : Qst 36-3 Staal wit verzinkt Cr3

Band en huis : 1.4016 / AISI 430 / X6 Cr17



Aanbevolen toepassing : 8.0 mm light duty / 14.0 mm medium duty

ALGEMENE TOEPASSINGEN waar corrosie bestendigheid is vereist, binnen en buiten in contact met water en vloeistoffen. Voedingsmiddelenindustrie, serre- en tuinbouw, vijvers enz....

Schroef : 1.4031 / AISI 304 / X5CrNi1810

Band en huis : 1.4031 / AISI 304 / X5CrNi1810



Aanbevolen toepassing : 8.0 mm light duty

TOEPASSINGEN waar HOGE corrosie bestendigheid is vereist, PETROCHEMIE, en zoute milieu's, yacht- en botenbouw, chemische industrie....

Schroef : 1.4571 / AISI 316/ X6CrNiMoTi17122

Band en huis : 1.4571 / AISI 316/ X6CrNiMoTi17122



HOW TO USE ENDLESS BANDING HOSE CLAMP

GEPERFOREERDE BAND :

Instructions for Use

①



Pass one end of the strap through the fastener head

②



Bend the strap upward at the right Angle

③



Pass the bent strap through the end of the fastener

④



Bend the strap flat



⑤



Tighten the fastener with a screwdriver



Volle band met kantelschroef :

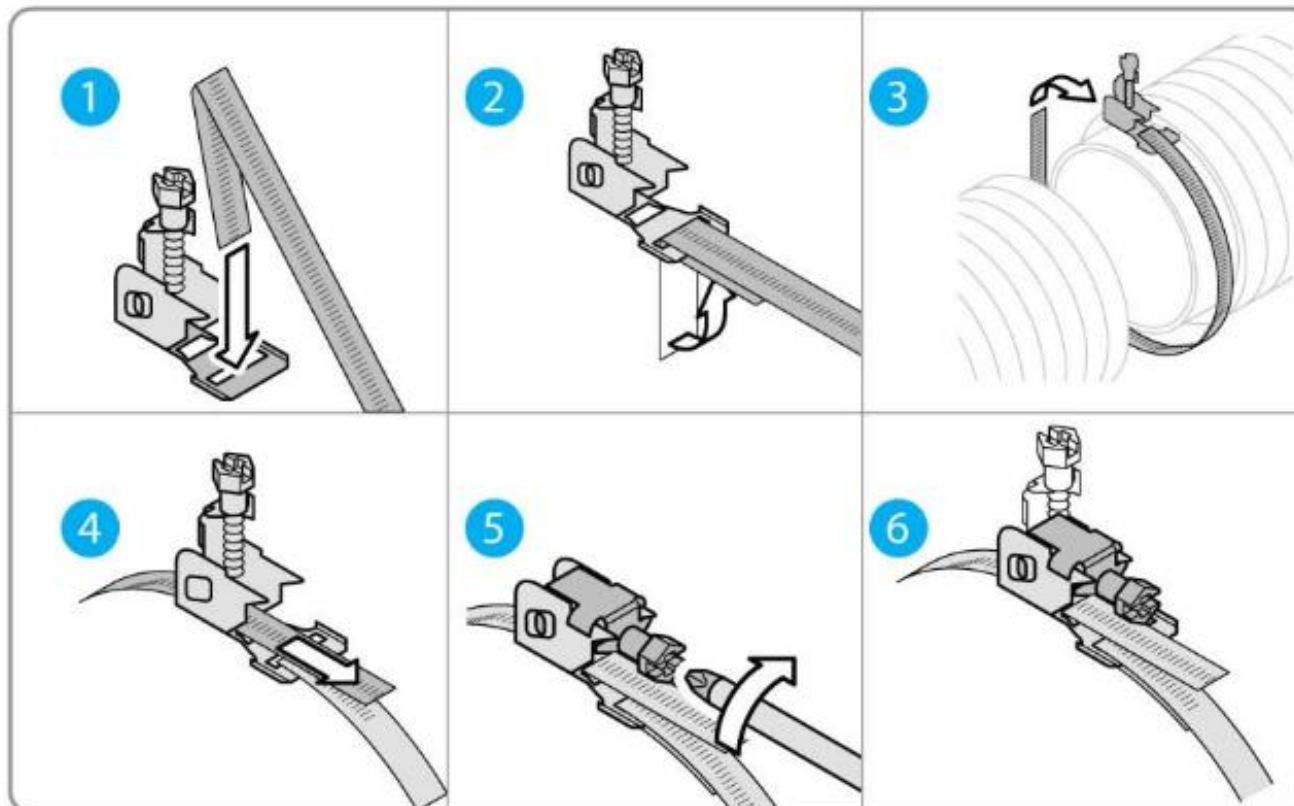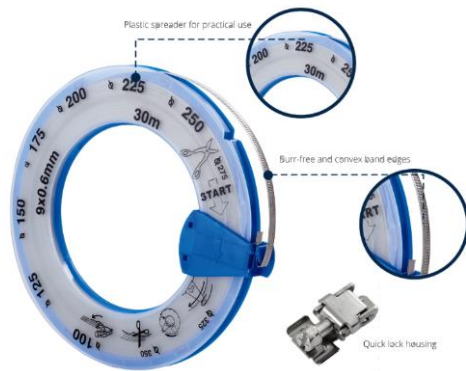

BAND MAAT MM	SCHROEF SW AANZET	WT ARTIKELNUMMER		Type	ADVISED TORQUE		Materiaal	Band Breedte x Dikte	Inhoud	
		WT system Retail pack			TIGHTENING ADV. TORQUE	BREAKING TORQUE			R-pack/pcs Pack Carton	
	 SW 7									
9		AUW2RWT-09BAND-030M	Band 30 meter	Volle band	5 Nm	N.A.	W2-AISI 430	9 mm x 0.7	1	10x1
9		AUW2RWT-09COMB-3M8S	Slotjes	Huisjes	5 Nm	N.A.	W2-AISI 430	9 mm x 0.7	1x50	10x50
9		AUW2RWT-09SLOT-0025	Combinatie slotjes + band	Set	5 Nm	N.A.	W2-AISI 430	9 mm x 0.7	1	10x1
8		AUW4RWT-08BANDP-003M	Band 3 meter	Perfo	3 Nm	N.A.	W4-AISI 304	8 mm x 0.65	1	10x1
8		AUW4RWT-08BANDP-030M	Band 30 meter	Perfo	3 Nm	N.A.	W4-AISI 304	8 mm x 0.65	1	10x1
8		AUW4RWT-08SLOTP-0050	Slotjes	Huisjes	3 Nm	N.A.	W4-AISI 304	8 mm x 0.65	1x50	10x50
8		AUW4RWT-08COMBP-3M6S	Combinatie slotjes + band	Set	3 Nm	N.A.	W4-AISI 304	8 mm x 0.65	1	10x1
9		AUW4RWT-09BAND-030M	Band 30 meter	Volle band	5 Nm	N.A.	W4-AISI 304	9 mm x 0.7	1	10x1
9		AUW4RWT-09COMB-3M8S	Combinatie slotjes + band	Set	5 Nm	N.A.	W4-AISI 304	9 mm x 0.7	1x50	10x50
9		AUW4RWT-09SLOT-0025	Slotjes	Huisjes	5 Nm	N.A.	W4-AISI 304	9 mm x 0.7	1	10x1
	 SW 7									
14		AUW4RWT-14BANDP-003M	Band 3 meter	Perfo	5 Nm	N.A.	W4-AISI 304	14 mm x 0.7	1	10x1
14		AUW4RWT-14BANDP-030M	Band 30 meter	Perfo	5 Nm	N.A.	W4-AISI 304	14 mm x 0.7	1	10x1
14		AUW4RWT-14SLOTP-0050	Slotjes	Huisjes	5 Nm	N.A.	W4-AISI 304	14 mm x 0.7	1x50	10x50
14		AUW4RWT-14COMBP-3M6S	Combinatie slotjes + band	Set	5 Nm	N.A.	W4-AISI 304	14 mm x 0.7	1	10x1
8		AUW5RWT-08BANDP-025M	Band 25 meter	Perfo	3 Nm	N.A.	W5-AISI 316	8 mm x 0.65	1	10x1
8		AUW5RWT-08SLOTP-0050	Slotjes	Huisjes	3 Nm	N.A.	W5-AISI 316	8 mm x 0.65	1x50	10x50