

# LICENCE

No. 22243 replaces No.11444

Issued to:

Applicant:

**Preflexibel NV - Reddy Seneffe**

**Parc Industriel de Tyberchamps 30**

**Zone A**

**7180 SENEFFE**

**Belgium**

Licensee:

**Preflexibel NV - Reddy Seneffe**

**Parc Industriel de Tyberchamps 30**

**Zone A**

**7180 SENEFFE**

**Belgium**



Product : mounting boxes, flush-type  
Trade name(s) : REDDY  
Type(s)/model(s) : B45, B45SV, B65, B65SV

The product and any acceptable variation thereto is specified in the annex to this licence and the documents therein referred to.

SGS CEBEC hereby declares that the above-mentioned product has been certified on the basis of:

- a type test according to the standard specified in annex
- an inspection of the production location
- a certification agreement with the number 243

SGS CEBEC hereby grants the right to use the CEBEC certification mark


The CEBEC certification mark may be applied to the product as specified in this licence for the duration of the CEBEC certification agreement and under the conditions of the CEBEC certification agreement.

This licence is issued on : 09/07/2021

ir. C. Lana,  
Certification Manager

© Only integral publication of this certificate, including the annex, is allowed

This certificate is only valid combined with the publication on the following web address: [www.sgs.com/ee](http://www.sgs.com/ee)

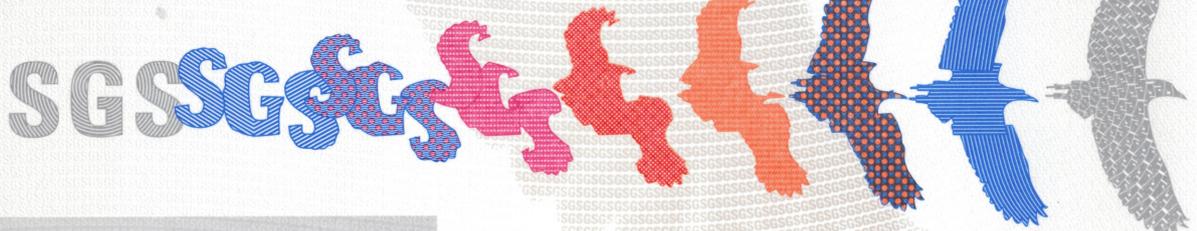

## SPECIFICATION OF THE CERTIFIED PRODUCT

### Product data

|                                 |   |  |
|---------------------------------|---|--|
| Product                         | : | mounting boxes, flush-type   |
| Trade name(s)                   | : | REDDY  |
| Type(s)/Model(s)                | : | B45, B45SV, B65, B65SV   |
| description                     | : | non-metallic-insulating (see appendix)                             |
| classification                  | : | 7.1.1, 7.2.1.1 & 7.2.3.2, 7.3.1, 7.3.3, 7.4.4, 7.5.1, 7.8.1, 7.8.3 |
| method of installation          | : | flush-mounting   |
| upper maximum temperature range | : | +60°C  |
| boxes depth                     | : | normal   |
| inlets for conduit entries      | : | see appendix   |
| knock-out inlets                | : | see appendix   |
| construction                    | : | coupling capacity 71 mm, by means of spacers                       |
| markings                        | : | on the box   |

### Product data - type B45, B45SV

|        |   |                   |
|--------|---|-------------------|
| design | : | boxes depth 45 mm |
|--------|---|-------------------|

### Product data - type B65, B65SV

|        |   |                   |
|--------|---|-------------------|
| design | : | boxes depth 65 mm |
|--------|---|-------------------|

## TESTS

### Test requirements

NBN C 61-670/ed.3  
NBN EN 60670-1:2005 + A1:2009 + A2:2013

### Test results

The test results are laid down in test report ref. 632077.01

**Conclusion**

The examination proved that all certification requirements were met.

Reviewed by, project leader : Luigi Zanutto - 09/07/2021

Certification Manager :



2021-07-09

**FACTORY LOCATION(S)**

Preflexibel NV - Reddy Seneffe  
Parc Industriel de Tyberchamps 30  
Zone A  
7180 SENEFFE  
Belgium

### Flush-type mounting box

| Type                         | Ref. | Screws    | Width x Height x Deep (mm) | Side circular knock-outs inlets | Side rectangular knock-outs inlets | Rear circular knock-outs inlet |
|------------------------------|------|-----------|----------------------------|---------------------------------|------------------------------------|--------------------------------|
| <b>Centre distance 71 mm</b> |      |           |                            |                                 |                                    |                                |
| <b>B45</b>                   | 0119 | 2 mounted | 60x60x45                   | 10 x 20 mm                      | 2 x 33 x 10 mm                     | 4 x 20 mm                      |
| <b>B45SV</b>                 | 0121 | None      | 60x60x45                   | 10 x 20 mm                      | 2 x 33 x 10 mm                     | 4 x 20 mm                      |
| <b>B65</b>                   | 0120 | 2 mounted | 60x60x65                   | 14 x 20 mm                      | 2 x 33 x 24 mm                     | 4 x 20 mm                      |
| <b>B65SV</b>                 | 0122 | None      | 60x60x65                   | 14 x 20 mm                      | 2 x 33 x 24 mm                     | 4 x 20 mm                      |

#### Material used :

- **Side parts :** Polypropylene HB12XF
- **Main housing :**
  - PVC IR4649554AA
  - Alternative : ABS 4136