

METALEN INSTALLATIEBUIS VERZINKT




TECHNICAL SPECIFICATIONS ACCORDING EN 61386 21 STANDARD • TECHNISCHE SPEZIFIZIERUNGEN GEMÄSS NORM EN 61386 21

- Code: 555711542010
- Use Temperature: -45 +400°C
- Compression resistance: > 4000 N
- Impact resistance: > 20 J a -45°C
- Corrosion Resistance: Media
- Not propagation the flame
- Material: Cold rolled low-carbon steel, DC03-grade according to EN 10130 standard
- Finished: Electrogalvanized

- Code: 555711542010
- Anwendungstemperatur: -45 +400°C
- Druckfestigkeit: > 4000 N
- Schlagfestigkeit: > 20 J a -45°C
- Korrosionsbeständigkeit von Rohrssystemen: Mittel
- Nicht brandfortleitend
- Material: Kaltlaminieretes Stahlband mit niedrigem Kohlenstoffanteil
Qualitätsklasse DC03 entsprechend Norm EN 10130
- Außenfläche: Elektrogalvanisiert

ARMET CONDUIT • ROHR ARMET

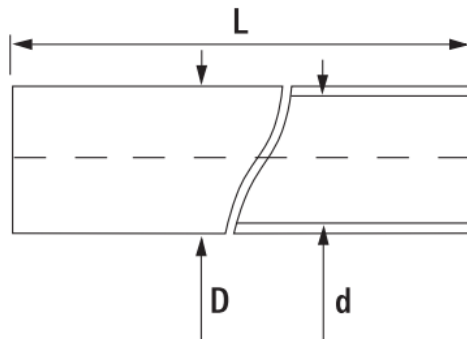

Referencia Reference Artikelnummer	ø Nominal ø Nominal Nenn ø	Longitud L Lenght L Länge L (mm)	Embalaje Packaging Verpackung (m)	Kg/Mazo Kg/Bundle Kg /Bund	Cod. EAN13 EAN13 Code EAN13 Code
010TARM016	M16	3000	51	20	8435179000001
010TARM020	M20	3000	30	15	8435179000018
010TARM025	M25	3000	30	19	8435179000025
010TARM032	M32	3000	21	20	8435179000032
010TARM040	M40	3000	15	18	8435179000049
010TARM050	M50	3000	15	26	8435179000056
010TARM063	M63	3000	9	21	8435179000063

WEDI TRADE ART.NR.

JVRVFAR-ZM16015-1X3M
JVRVFAR-ZM20015-1X3M
JVRVFAR-ZM25015-1X3M
JVRVFAR-ZM32015-1X3M
JVRVFAR-ZM40015-1X3M
JVRVFAR-ZM50015-1X3M
JVRVFAR-ZM63015-1X3M

