


EINDKAPPEN met SOLDEERRING STANDAARD UITVOERING WATERPROOF



SOLDER GRIP END CONNECTORS NORMAL

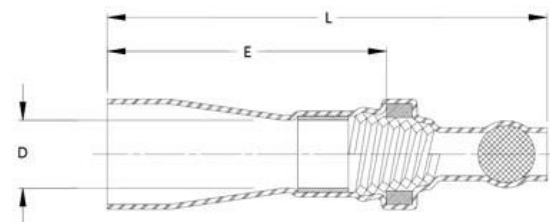

features:

INSULATION:	Polyolefin
FLAMMABILITY:	UL-V2
CONICAL SPRING :	Square copper wire
END CLOSURE BALL:	Tinted glass
SOLDER PREFORM:	With Flux

Fabric Partnr.	WT ARTIKELNUMMER			Type PVC INSULATED	Wire range		AFMETINGEN							Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack		AWG	MM ²	L	Ø A	B	L				I-pack Pack	Carton	R-pack Pack	Carton	S-pack Pack	Carton
SGRS-1	CBWKITY00000240-0100	CBWKRWT00000240-0050	x	Polyolefin	19~13	0.7~2.4	38.3	3.6	26.0	18.5				100	1000	1x50	10x50	x	x
SGRS-2	CBWKITY00000400-0100	CBWKRWT00000400-0050	CBWKSWT00000400-2002	Polyolefin	14~12	2.0~4.0	37.7	5.0	23.5	20.0				100	1000	1x50	10x50	6x2	60x2
SGRS-3	CBWKITY00000900-0100	CBWKRWT00000900-0025	CBWKSWT00000900-2002	Polyolefin	12~8	3.5~8.0	45.5	7.5	26.5					100	1000	1x25	10x25	6x2	60x2
SGRS-4	CBWKITY00001500-0100	CBWKRWT00001500-0025	x	Polyolefin	8~6	7.5~12.0	45.0	9.4	25.5	25.5				100	1000	1x25	10x25	x	x