



BUISBEUGEL "CLASSIC" DUBBELE BOUTBEVESTIGING



MOER M8

DESCRIPTION:

DESCRIPTION:

Two-screw pipe clamp is produced in dimension of 1/4" to 6/4" (12–53 mm).

Pipe clamps of a dimension from 12–16 mm to 48–53 mm are equipped with an M8 clamping head.

FIELDS:

Water, heat, gas

Steam pipes and chimneys (combined
with a silicone profile)

Waste pipes

Pneumatic tube

Electrical installation

USE:

Steel pipes

Plastic pipes

Copper pipes

Cast iron pipes

Glass pipes

Electrical cables

ADVANTAGES:

Compact structural design of the clamp enables simple and full piping insulation without larger overlap in the area of the toggle and closing device. All this is possible even using a small thickness of insulating material.

Screws have a combined head with a cross and a slot.

The pipe clamp is checked regarding noise protection according to DIN 4109.

It prevents the action of electrolysis.

M8/M10 clamping head with a combined thread starting with a dimension of 54–59 mm enables universal connection.

Temperature resistivity of up to 225 °C is ensured in combination with a silicone profile.

Two-screw pipe clamps satisfy the highest requirements while mounting on walls, ceilings and floors but also in connection with pipes used in sanitary installations.

This product is registered at [European Designs](#).

TECHNICAL DATA OF PIPE CLAMP:

Load causing break due to centric tension:

from 12-16 mm to 48-53 mm – 3 kN

Maximum safe centric load:

from 12-16 mm to 48-53 mm – 0,8 kN

Pipe clamp material:



DIN EN 10111

Surface coating:

zinc plated

Certificate:

TZUS:No.204/C5/2013/070-045127

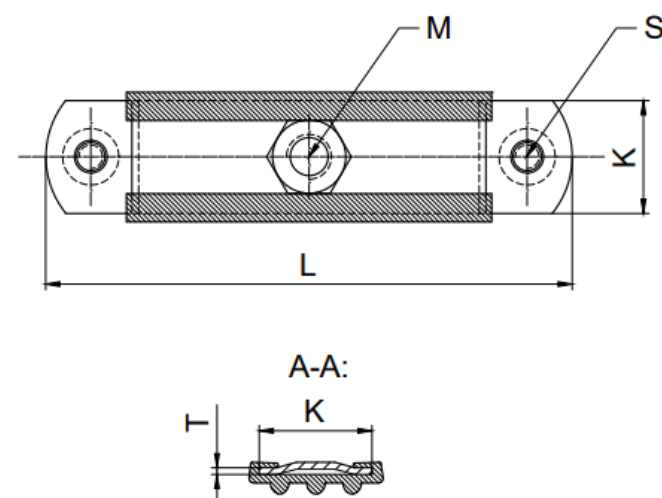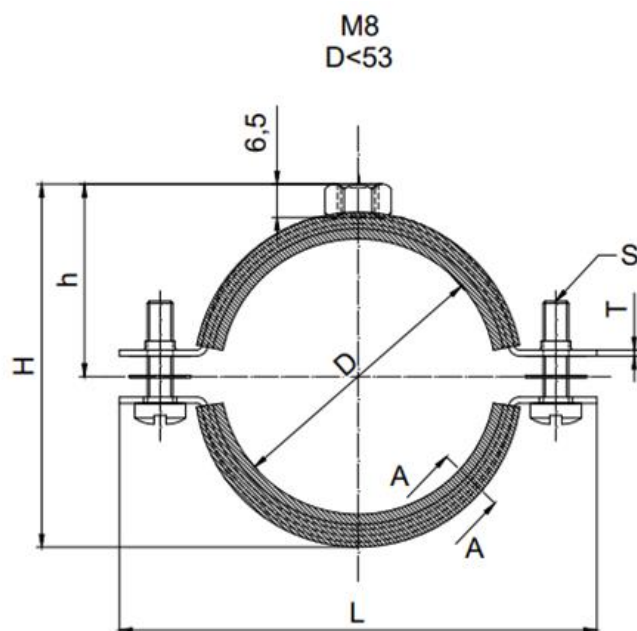

TECHNICAL DATA OF RUBBER LINING:

Material: EPDM

Reaction to fire: DIN 4102:1998

Building material class: B2

Use within temperature range: from -50°C to +120°C

Hardness of rubber lining: 45° ± 5 Shore A / 15 s

Noise protection: DIN 4109



Supply No.	Supply No.	Name	D	D	DN	M	S	K	L	T	H	h	Package
Nut M8	Nut M8/M10		(mm)	(")	(mm)	Nut	Screw	(mm)	(mm)	(mm)	(mm)	(mm)	(pcs)
12001216	12221216	Two-screw pipe clamp M8 12-16 1/4"	12-16	1/4	8	M8, M8/M10	M5 × 20 mm	20	55	1,2	33,9/44,4	20,2/30,7	100
12001719	12221719	Two-screw pipe clamp M8 17-19 3/8"	17-19	3/8	10	M8, M8/M10	M5 × 20 mm	20	58	1,2	36,9/47,4	21,7/32,2	100
12002023	12222023	Two-screw pipe clamp M8 20-23 1/2"	20-23	1/2	15	M8, M8/M10	M5 × 20 mm	20	61	1,2	40,9/51,4	23,7/34,2	100
12002530	12222530	Two-screw pipe clamp M8 25-30 3/4"	25-30	3/4	20	M8, M8/M10	M5 × 20 mm	20	67	1,2	47,9/58,4	27,2/37,2	100
12003138	12223138	Two-screw pipe clamp M8 31-38 1"	31-38	1	25	M8, M8/M10	M5 × 20 mm	20	78	1,2	55,9/66,4	31,2/41,7	100
12004046	12224046	Two-screw pipe clamp M8 40-46 5/4"	40-46	5/4	32	M8, M8/M10	M5 × 20 mm	20	86	1,2	63,9/74,4	35,2/45,7	100
12004853	12004853	Two-screw pipe clamp M8 48-53 6/4"	48-53	6/4	40	M8, M8/M10	M5 × 20 mm	20	94	1,2	70,9/81,4	38,7/49,2	50


CROSS-REFERENCE TABEL :

Konarik	WT ARTIKELNUMMER			Type	Afmeting			Schroef	Band			Inhoud					
	Industrial pack	WT system	WT system		Klemdiameter					I-pack/pcs		R-pack/pcs		S-pack/pcs			
	Fabric pack	Retail pack	Small pack		ø mm	“mm				Pack	Carton	Pack	Carton	Pack	Carton		
Partnr.								D x L	Breedte x Dikte								
12001216	IFVZIMCE012016-0100	IFVZRWTCE012016-0050	IFVZIMCE012016-Z001	M8	12–16	1/4”		M5 × 20 mm	20 x 1,2		100		50	10	1	100	
12001719	IFVZIMCE017019-0100	IFVZRWTCE017019-0050	IFVZIMCE017019-Z001	M8	17–19	3/8”		M5 × 20 mm	20 x 1,2		100		50	10	1	100	
12002023	IFVZIMCE020023-0100	IFVZRWTCE020023-0050	IFVZIMCE020023-Z001	M8	20–23	1/2”		M5 × 20 mm	20 x 1,2		100		50	10	1	100	
12002530	IFVZIMCE025030-0100	IFVZRWTCE025030-0025	IFVZIMCE025030-Z001	M8	25–30	3/4”		M5 × 20 mm	20 x 1,2		100		25	10	1	100	
12003138	IFVZIMCE031038-0100	IFVZRWTCE031038-0025	IFVZIMCE031038-E001	M8	31–38	1”		M5 × 20 mm	20 x 1,2		100		25	10	1	100	
12004046	IFVZIMCE040046-0100	IFVZRWTCE040046-0025	IFVZIMCE040046-E001	M8	40–46	5/4”		M5 × 20 mm	20 x 1,2		100		25	10	1	100	
12004853	IFVZIMCE048053-0050	IFVZRWTCE048053-0025	IFVZIMCE048053-E001	M8	48–53	6/4”		M5 × 20 mm	20 x 1,2		50		25	10	1	100	
12005459	IFVZIMCE054059-0050	IFVZRWTCE054059-0010	IFVZIMCE054059-E001	M8	54–59	-		M6 × 20 mm	20 x 1,2		50		10	10	1	100	


HOW TO USE :




1

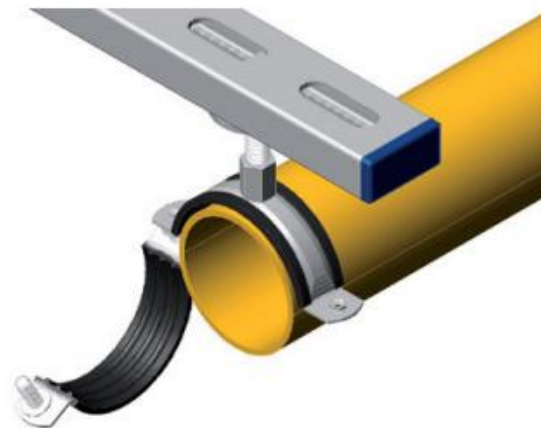

2

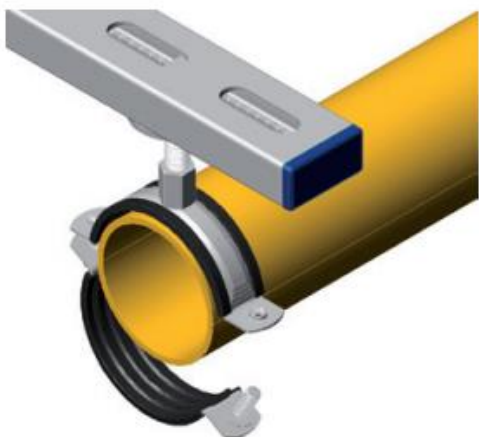

3

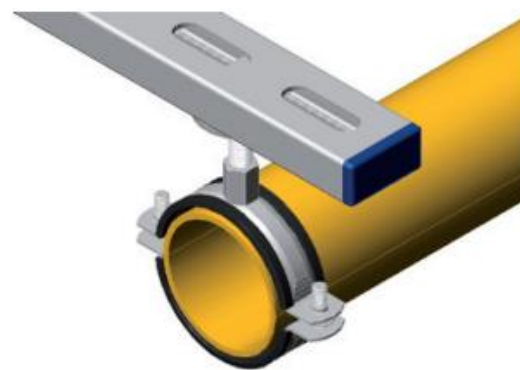

4

ADVIES : GEBRUIK DEZE BEVESTIGINGSMATERIALEN :

