

BUISBEUGEL "CLASSIC"
DUBBELE BOUTBEVESTIGING
MET SILICONE INLAGE



COMBIMOER M8/M10

DESCRIPTION:

Single-screw or two-screw pipe clamp with silicone/slide rubber lining on the pipes with operating temperature up to 225°C or where the pipes must be fixed as sliding point. Thanks the silicone/slide rubber lining is resistant to high temperatures and do not prevents the natural dilatation of the pipe

FIELDS:

Water, heat, gas

Waste pipes

USE:

Plastic pipes

Copper pipes

ADVANTAGES:

Compact structural design of the clamp enables simple and full piping insulation without larger overlap in the area of the toggle and closing device. All this is possible even using a small thickness of insulating material.

Screws have a combined head with a cross and a slot.

The pipe clamp is checked regarding noise protection according to DIN 4109.

It prevents the action of electrolysis.

Two-screw slide pipe clamps satisfy the highest requirements while mounting on walls, ceilings and floors but also in connection with pipes used in sanitary installations.



TECHNICAL DATA OF PIPE CLAMP:

Maximum safe load of two-screw pipe clamp	2,1 kN
---	--------

Pipe clamp material:	DIN EN 10111
----------------------	--------------

Surface coating:	zinc plated
------------------	-------------

Certificate:	TZUS:No.204/C5/2013/070-045127
--------------	--------------------------------

TECHNICAL DATA OF SILICONE LINING:

Material:	silicone
-----------	----------



Reaction to fire:	according to DIN 4102:1998
-------------------	----------------------------

Building material class	B2
-------------------------	----

Use within temperature range:	from -50 °C to +225 °C
-------------------------------	------------------------

Hardness of rubber lining:	60° ± 5 Shore A / 15 s
----------------------------	------------------------

Supply No.	Name	Diameter of pipe		DN	M	S	K	L	T	H	h	Package
		D(mm)	D(in)		Nut	Screw	(mm)	(mm)	(mm)	(mm)	(mm)	
13005459	Two-screw slide pipe clamp M8/M10 54-59 mm	54-59	-	-	M8/M10	M6 × 20 mm	20	105	1,2	87,4	52,2	50
13006064	Two-screw slide pipe clamp M8/M10 60-64 mm 2"	60-64	2"	50	M8/M10	M6 × 20 mm	20	110	1,5	93	55	50
13006771	Two-screw slide pipe clamp M8/M10 67-71 mm	67-71	-	-	M8/M10	M6 × 20 mm	20	120	1,5	100	58,5	50
13007278	Two-screw slide pipe clamp M8/M10 72-78 mm 2 1/2"	72-78	2 1/2"	65	M8/M10	M6 × 20 mm	25	130	1,5	109	63	50
13008186	Two-screw slide pipe clamp M8/M10 81-86 mm	81-86	-	-	M8/M10	M6 × 25 mm	25	140	1,5	117	67	50
13008792	Two-screw slide pipe clamp M8/M10 87-92 mm 3"	87-92	3"	80	M8/M10	M6 × 25 mm	25	145	1,5	123	70	50
13101106	Two-screw slide pipe clamp M8/M10 110 mm 4"	110	4"	100	M8/M10	M6 × 30 mm	25	170	2	142	79,5	50
13101125	Two-screw slide pipe clamp M8/M10 121-127 mm	121-127	-	-	M8/M10	M8 × 30 mm	25	186	2,5	160	88,5	25
13101150	Two-screw slide pipe clamp M8/M10 159-168 mm 6"	159-168	6"	150	M8/M10	M8 × 30 mm	25	230	2,5	201	109	25

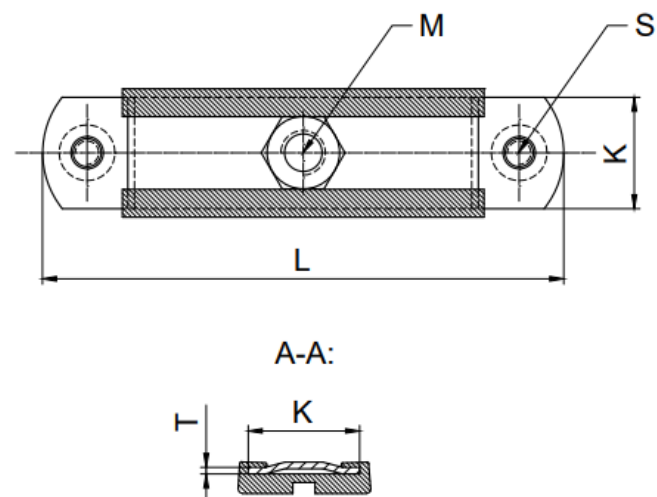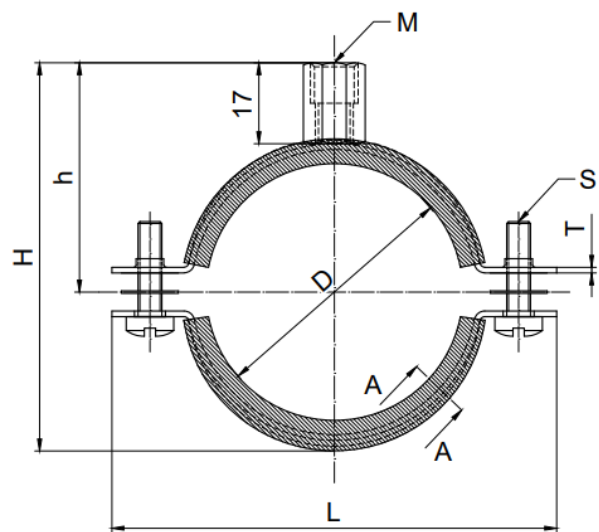

CROSS-REFERENCE TABEL :

Konarik Partnr.	WT ARTIKELNUMMER			Type	Afmeting		Inhoud		I-pack/pcs Pack Carton	R-pack/pcs Pack Carton	S-pack/pcs Pack Carton
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack		Klemdiameter Ø mm	"mm					
13005459	IGSCIZMSE054059-0050	X	X	M8/M10	54-59	-	50	500			
13006064	IGSCIZMSE060064-0050	X	X	M8/M10	60-64	2"	50	500			
13006771	IGSCIZMSE067071-0050	X	X	M8/M10	67-71	-	50	500			
13007278	IGSCIZMSE072078-0050	X	X	M8/M10	72-78	2 1/2"	50	500			
13008186	IGSCIZMSE081086-0050	X	X	M8/M10	81-86	-	50	500			
13008792	IGSCIZMSE087092-0050	X	X	M8/M10	87-92	3"	50	500			
13101106	IGSCIZMSE100110-0050	X	X	M8/M10	110	4"	50	500			
13101125	X	X	X	M8/M10	121-127	-	25	250			
13101150	X	X	X	M8/M10	159-168	6"	25	100			


ADVIES : GEBRUIK DEZE BEVESTIGINGSMATERIALEN :




HOW TO USE :




1

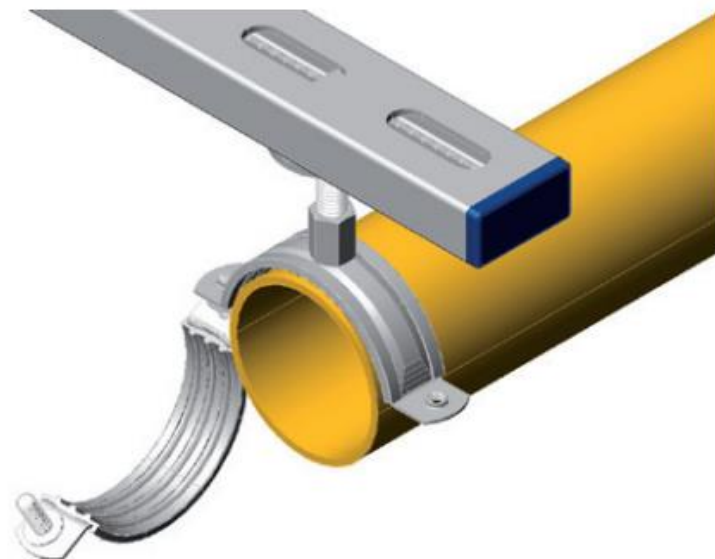

2

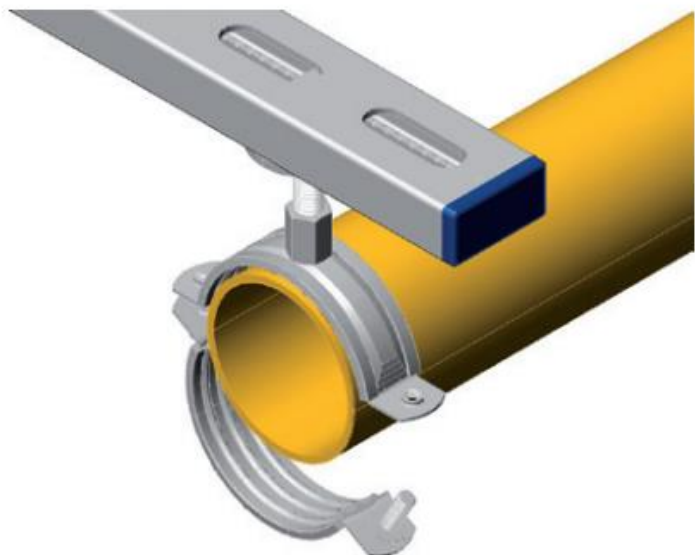

3

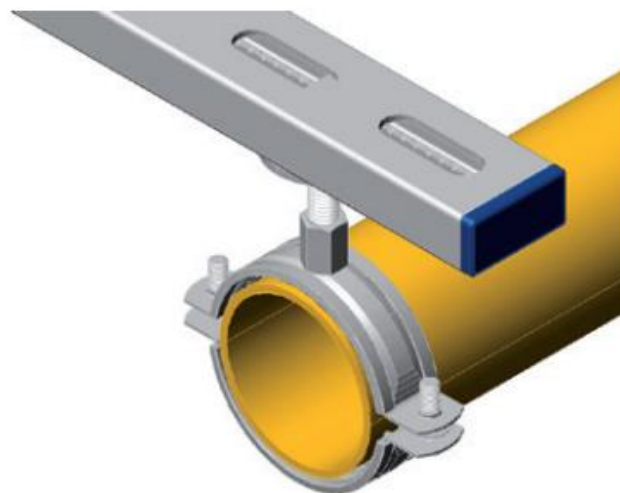

4