

BUISBEUGEL "CLASSIC"
DUBBELE BOUTBEVESTIGING
MET SILICONE INLAGE



MOER M8

DESCRIPTION:

Single-screw or two-screw pipe clamp with silicone/slide rubber lining on the pipes with operating temperature up to 225°C or where the pipes must be fixed as sliding point. Thanks the silicone/slide rubber lining is resistant to high temperatures and do not prevents the natural dilatation of the pipe

FIELDS:

Water, heat, gas

Waste pipes

USE:

Plastic pipes

Copper pipes

ADVANTAGES:

Compact structural design of the clamp enables simple and full piping insulation without larger overlap in the area of the toggle and closing device. All this is possible even using a small thickness of insulating material.

Screws have a combined head with a cross and a slot.

The pipe clamp is checked regarding noise protection according to DIN 4109.

It prevents the action of electrolysis.

Single-screw slide pipe clamps satisfy the highest requirements while mounting on walls, ceilings and floors but also in connection with pipes used in sanitary installations.



TECHNICAL DATA OF PIPE CLAMP:

Maximum safe load of single-screw pipe clamp	0,8 kN
--	--------

Pipe clamp material:	DIN EN 10111
----------------------	--------------

Surface coating:	zinc plated
------------------	-------------

Certificate:	TZUS:No.204/C5/2013/070-045127
--------------	--------------------------------

TECHNICAL DATA OF SILICONE LINING:

Material:	silicone
-----------	----------



Reaction to fire:	according to DIN 4102:1998
-------------------	----------------------------

Building material class	B2
-------------------------	----

Use within temperature range:	from -50 °C to +225 °C
-------------------------------	------------------------

Hardness of rubber lining:	60° ± 5 Shore A / 15 s
----------------------------	------------------------

Supply No.	Name	Diameter of pipe		DN	M	S	K	L	T	H	h	Package
		D(mm)	D(in)									
13001216	Single-screw slide pipe clamp M8 12-16 mm 1/4"	12-16	1/4"	8	M8	M5 × 25 mm	20	60	1	32,5	20	100
13001719	Single-screw slide pipe clamp M8 17-19 mm 3/4"	17-19	3/4"	10	M8	M5 × 25 mm	20	60	1	36,5	21,5	100
13002023	Single-screw slide pipe clamp M8 20-23 mm 1/2"	20-23	1/2"	15	M8	M5 × 25 mm	20	65	1	40,5	23,5	100
13002530	Single-screw slide pipe clamp M8 25-30 mm 3/4"	25-30	3/4"	20	M8	M5 × 25 mm	20	70	1	47,5	27	100
13003138	Single-screw slide pipe clamp M8 31-38 mm 1"	31-38	1"	25	M8	M5 × 25 mm	20	78	1	55,5	31	100
13004046	Single-screw slide pipe clamp M8 40-46 mm 5/4"	40-46	5/4"	32	M8	M5 × 25 mm	20	88	1	63,5	35	100
13004853	Single-screw slide pipe clamp M8 48-53 mm 6/4"	48-53	6/4"	40	M8	M5 × 25 mm	20	96	1	70,5	38,5	50

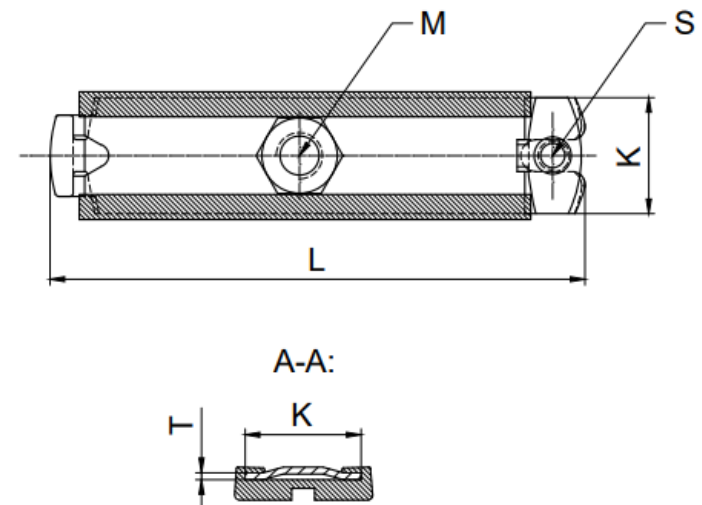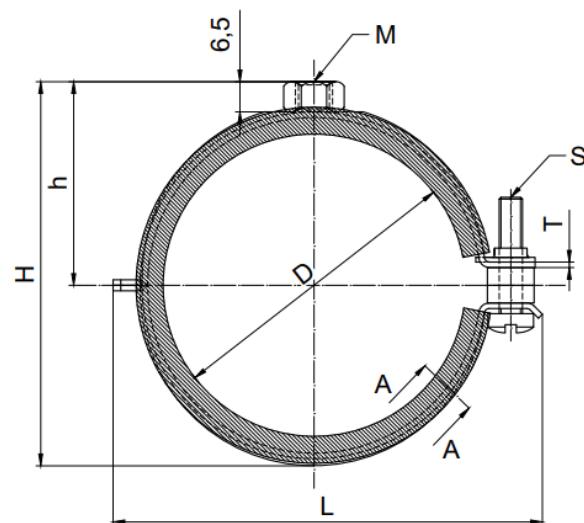

CROSS-REFERENCE TABEL :

Konarik Partnr.	WT ARTIKELNUMMER			Type	Afmeting		Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack		Klemdiameter ø mm	"mm	I-pack/pcs Pack	Carton	R-pack/pcs Pack	Carton	S-pack/pcs Pack	Carton
13001216	IGSCIZMQE012016-0100	X	X	M8/M10	12-16	1/4"	100	1000				
13001719	IGSCIZMQE017019-0100	X	X	M8/M10	17-19	3/8"	100	1000				
13002023	IGSCIZMQE020023-0100	X	X	M8/M10	20-23	1/2"	100	1000				
13002530	IGSCIZMQE025030-0100	X	X	M8/M10	25-30	3/4"	100	1000				
13003138	IGSCIZMQE031038-0100	X	X	M8/M10	31-38	1"	100	1000				
13004046	IGSCIZMQE040046-0100	X	X	M8/M10	40-46	5/4"	100	1000				
13004853	IGSCIZMQE048053-0050	X	X	M8/M10	48-53	6/4"	50	500				


ADVIES : GEBRUIK DEZE BEVESTIGINGSMATERIALEN :




HOW TO USE :




1

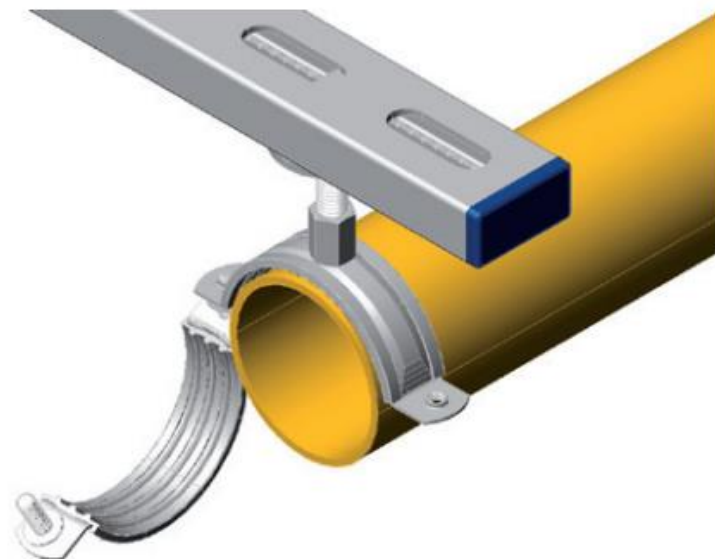

2

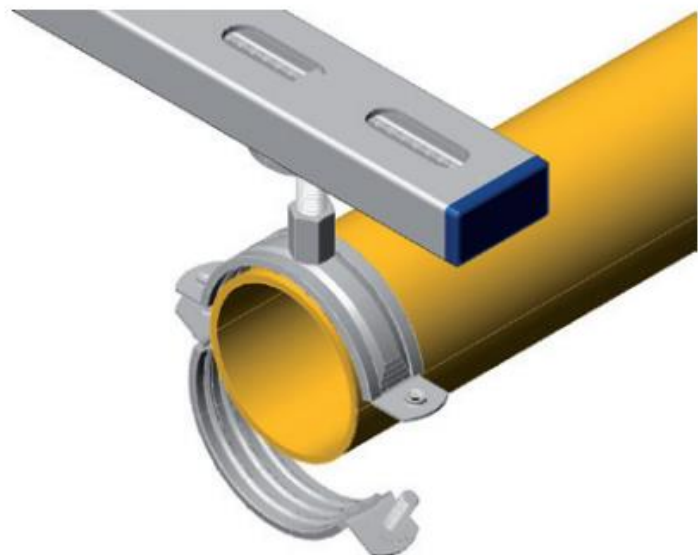

3

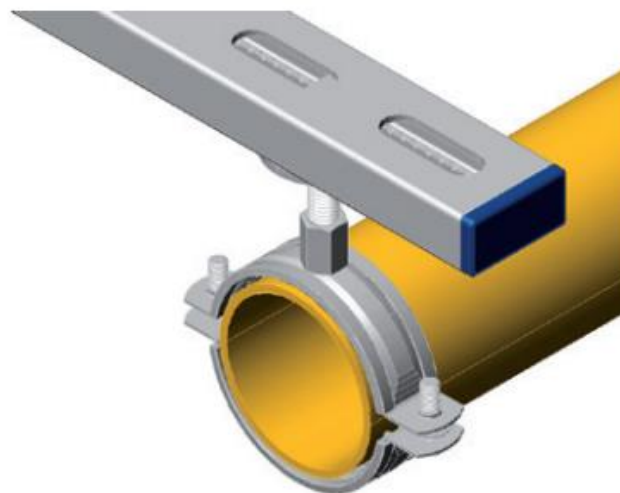

4