

U-BEUGEL HEAVY DUTY
INOX A2 MET
OPGEMONTEERDE MOER

KOŇAŘÍK[®]
závěsová technika

INOX
Stainless Steel
A2 AISI-304



DESCRIPTION:

U-bolt is simple product for fixing the pipes. It can be used as a simple fixed point (U-bolt with two nuts) or as sliding point (U-bolt with 4 nuts) for fixing the pipes with a maximum operating temperature up to 300°C.

The U-bolts according ČSN 130725.0 are supplied with 4 nuts DIN934.

The load capacity is only for information and calculated for u-bolts from steel 11 373.0 for the maximum working temperature 300°C.

FIELDS:

Water, heat, gas

Steam pipes and chimneys (combined with a silicone profile)

Waste pipes

Electrical installation

Cooling and freezing technology

USE:

Steel pipes

Copper pipes


Stainless steel pipes

Cast iron pipes

Fixing points

Electrical cables

Supply No.	Name	DN	Diameter	Span	Size	Size	Size	Size	Load	Load	Weight	Package
			D (mm)	C (mm)	L (mm)	L1 (mm)	L2 (mm)	M (mm)	Fs (kg)	Ft (kg)	(kg/pc)	(pcs)
22402010	U-bolt DN10 M6 20 mm ČSN130725.0 stainless A2	10	20	26	39	23	15	M6	–	–	0,027	1
22402015	U-bolt DN15 M6 25 mm ČSN130725.0 stainless A2	15	25	31	44,5	26	15	M6	–	–	0,03	1
22402020	U-bolt DN20 M8 30 mm ČSN130725.0 stainless A2	20	30	38	55	32	15	M8	–	–	0,065	1
22402025	U-bolt DN25 M8 36 mm ČSN130725.0 stainless A2	25	36	44	60	34	15	M8	–	–	0,07	1
22402032	U-bolt DN32 M8 45 mm ČSN130725.0 stainless A2	32	45	53	70,5	40	20	M8	–	–	0,081	1
22402040	U-bolt DN40 M10 51 mm ČSN130725.0 stainless A2	40	51	61	80,5	45	20	M10	–	–	0,158	1
22402050	U-bolt DN50 M10 63 mm ČSN130725.0 stainless A2	50	63	73	91,5	50	32	M10	–	–	0,177	1
22402065	U-bolt DN65 M12 63 mm ČSN130725.0 stainless A2	65	80	92	116	64	40	M12	–	–	0,3	1
22402080	U-bolt DN80 M12 94 mm ČSN130725.0 stainless A2	80	93	105	130,5	72	40	M12	–	–	0,35	1
22402100	U-bolt DN100 M16 116 mm ČSN130725.0 stainless A2	100	116	132	164	90	50	M16	–	–	0,75	1
22402125	U-bolt DN125 M16 145 mm ČSN130725.0 stainless A2	125	145	161	193,5	105	55	M16	–	–	0,86	1
22402150	U-bolt DN150 M16 170 mm ČSN130725.0 stainless A2	150	170	186	221	120	55	M16	–	–	0,96	1
22402200	U-bolt DN200 M20 227 mm ČSN130725.0 stainless A2	200	227	247	283,5	150	60	M20	–	–	1,95	1
22402200	U-bolt DN200 M20 227 mm ČSN130725.0 stainless A2	200	227	247	283,5	150	60	M20	–	–	1,95	1
22402250	U-bolt DN250 M20 284 mm ČSN130725.0 stainless A2	250	284	304	342	180	65	M20	–	–	2,32	1
22402300	U-bolt DN300 M20 334 mm ČSN130725.0 stainless A2	300	334	354	392	205	65	M20	–	–	2,64	1
22402350	U-bolt DN350 M20 365 mm ČSN130725.0 stainless A2	350	365	385	422,5	220	70	M20	–	–	2,84	1

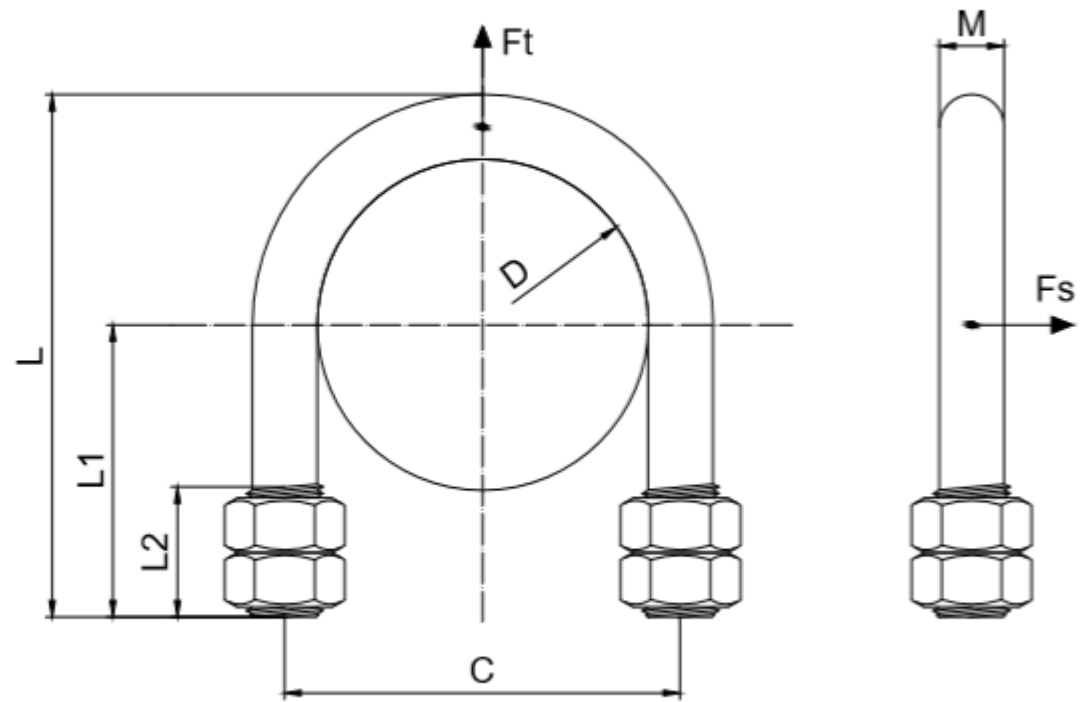


CROSS-REFERENCE TABEL :

Konarik Partnr.	WT ARTIKELNUMMER						I-pack/pcs		Inhoud		S-pack/pcs	
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack				Pack	Carton	R-pack/pcs Pack	Carton	Pack	Carton
22402010	DUHDIZ2-M06DN010-010	x	x				10	50				
22402015	DUHDIZ2-M06DN015-010	x	x				10	50				
22402020	DUHDIZ2-M08DN020-010	x	x				10	50				
22402025	DUHDIZ2-M08DN025-010	x	x				10	50				
22402032	DUHDIZ2-M08DN032-010	x	x				10	50				
22402040	DUHDIZ2-M10DN040-010	x	x				10	50				
22402050	DUHDIZ2-M10DN050-010	x	x				10	50				
22402065	DUHDIZ2-M12DN065-010	x	x				10	50				
22402080	DUHDIZ2-M12DN080-010	x	x				10	50				
22402100	DUHDIZ2-M16DN100-001	x	x				5	10				
22402125	DUHDIZ2-M16DN125-001	x	x				5	10				
22402150	DUHDIZ2-M16DN150-001	x	x				5	10				
22402200	DUHDIZ2-M20DN200-001	x	x				5	10				
22402250	DUHDIZ2-M20DN250-001	x	x				5	10				
22402300	DUHDIZ2-M20DN300-001	x	x				5	10				
22402350	DUHDIZ2-M20DN350-001	x	x				5	10				

HOW TO USE :




1

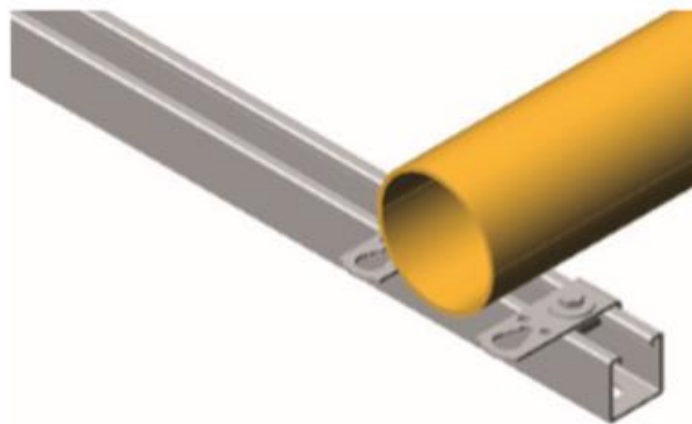

2



3

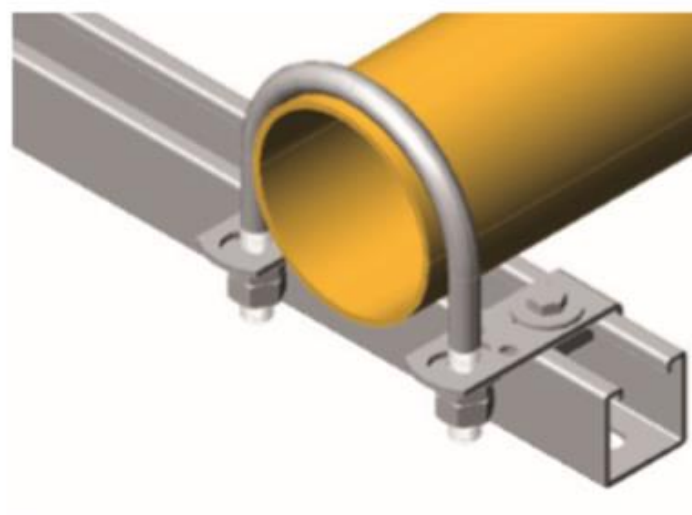

4