



2-POOTS-ZADEL VERSTERKT/VERZINKT

KOŇAŘÍK®
závěsová technika



DESCRIPTION:

Single clamps for the fixing of pipes and cables as from a diameter of 10 mm to 50 mm. The fixing is either one-sided (a type) or two-sided (c type). For installation recommend using knock-in anchor or ceiling steel wall plug.

FIELDS:

Water, heat, gas

Electrical installation

USE:

Plastic pipes

Copper pipes



Electrical cables

TECHNICAL DATA OF PIPE CLAMP:

Surface coating:

zinc plated

Supply No.	Name	D (mm)	H (mm)	B (mm)	K × T (mm)	Balení (ks)
19403010	Floor clamp type „C“ 10	10	11	44	14 × 1	200
19403013	Floor clamp type „C“ 13	13	14	47	14 × 1	200
19403016	Floor clamp type „C“ 16	16	17	50	14 × 1	100
19403019	Floor clamp type „C“ 19	19	20	53	14 × 1	100
19403022	Floor clamp type „C“ 22	22	23	56	14 × 1	100
19403026	Floor clamp type „C“ 26	26	27	60	14 × 1	100
19403028	Floor clamp type „C“ 28	28	29	62	14 × 1	100
19403032	Floor clamp type „C“ 32	32	33	66	14 × 1	100
19403038	Floor clamp type „C“ 38	38	39	75	14 × 1	100
19403050	Floor clamp type „C“ 50	50	51	87	14 × 1	50

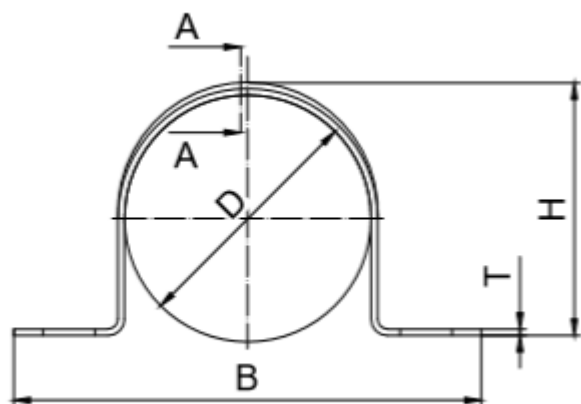

CROSS-REFERENCE TABEL :


Konarik Partnr.	WT ARTIKELNUMMER			Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack	I-pack/pcs		R-pack/pcs		S-pack/pcs	
				Pack	Carton	Pack	Carton	Pack	Carton
19403010	DCVZISM-VZ2PE10-0200	x	x	200	2000				
19403013	DCVZISM-VZ2PE13-0200	x	x	200	2000				
19403016	DCVZISM-VZ2PE16-0100	DCVZRWT-VZ2PE16-0100	DCVZSWT-VZ2PE16-Z005	100	1000	1x100	10x100	6x5	60x5
19403019	DCVZISM-VZ2PE20-0100	DCVZRWT-VZ2PE20-0100	DCVZSWT-VZ2PE20-Z005	100	1000	1x100	10x100	6x5	60x5
19403022	DCVZISM-VZ2PE22-0100	x	x	100	1000				
19403026	DCVZISM-VZ2PE26-0100	DCVZRWT-VZ2PE26-0100	DCVZSWT-VZ2PE26-Z005	100	1000	1x100	10x100	6x5	60x5
19403028	DCVZISM-VZ2PE28-0100	x	x	100	1000				
19403032	DCVZISM-VZ2PE32-0100	x	x	100	1000				
19403038	DCVZISM-VZ2PE38-0100	x	x	100	1000				
19403050	DCVZISM-VZ2PE50-0050	x	x	50	500				

GEBRUIK DEZE BEVESTIGINGSMATERIALEN :


FIXPIN



SCHROEF EN PLUG COMBINATIE

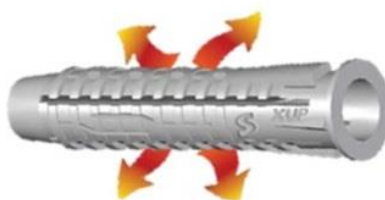

Smart®



HOW TO USE :

