

MONTAGERAIL
27/18x1.25 VERZINKT



**Zinc
Plated**

27x18x1.25 mm

Description

The fixing rail is used for the fixing of pipe and air conditioning distribution systems and electric paths.

Fixing rails are designed for indoor installation.

For outdoor installation it is necessary to choose the surface coating of hot dip galvanizing or stainless steel.


Advantages:

- The fixing rail can be fixed in many different ways to walls, ceilings and floors thanks to different geometry of openings.
- A wide range of accessories is offered for the fixing of the fixing rails.

Technical data

- Surface coating: electro zinc plated steel




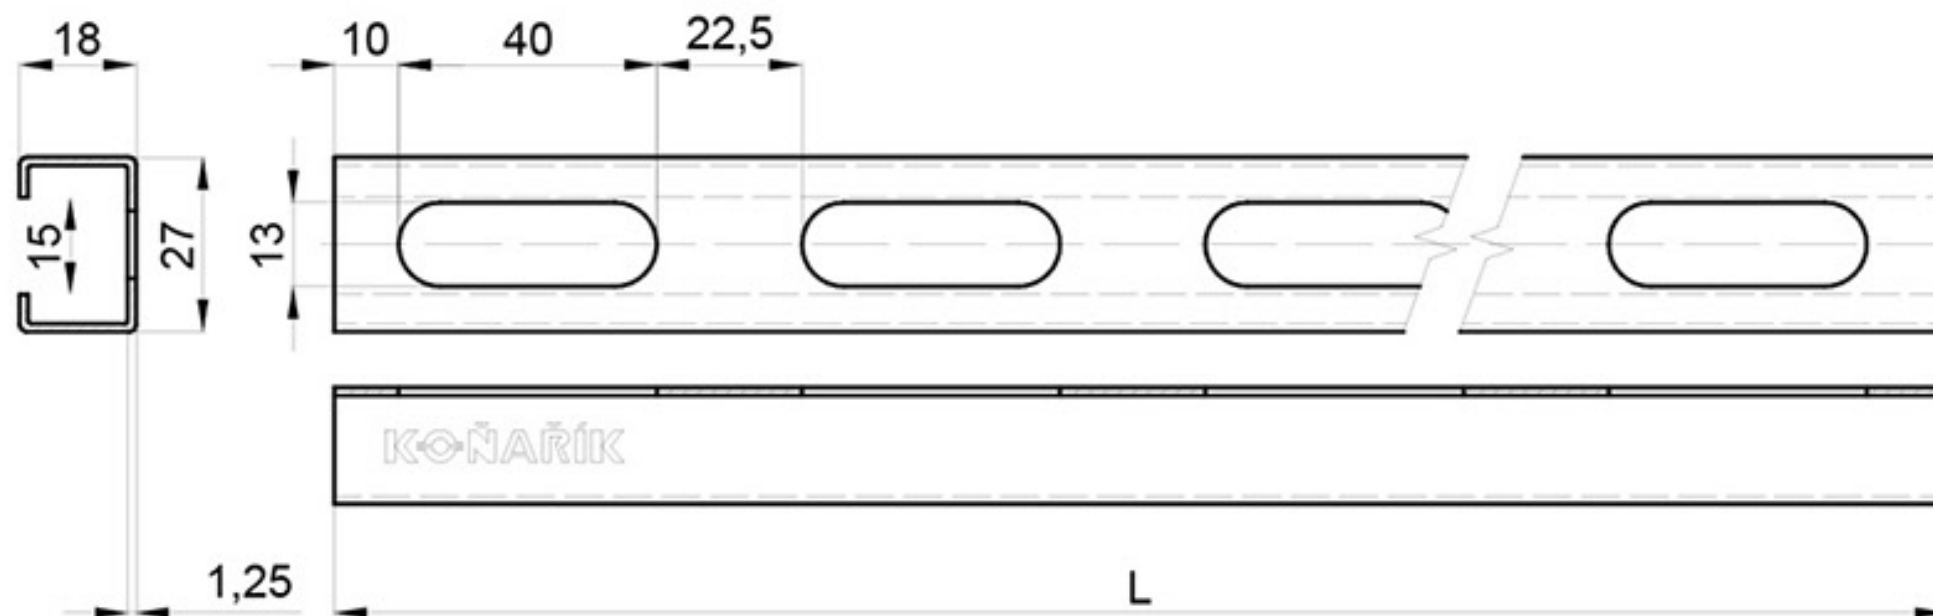

Fabr. Partnr.	WT ARTIKELNUMMER			Afmetingen in MM				Materiaal	Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack	Lengte	Breedte	Hoogte	Dikte		I-pack/pcs Pack Carton		R-pack/pcs Pack Carton		S-pack/pcs Pack Carton	
31271820	IRVCIZ1-27180200-012		IRVCSWT-P271812M0200	200	27	18	1,25	Verzinkt	12	120			12x1	120x1
31271840	IRVCIZ1-27180400-012		IRVCSWT-P271812M0400	400	27	18	1,25	Verzinkt	12	120			12x1	120x1
31271860	IRVCIZ1-27180600-012		IRVCSWT-P271812M0600	600	27	18	1,25	Verzinkt	12	120			12x1	120x1
31272000	IRVCIZ1-27182000-012		IRVCSWT-P271812M2000	2000	27	18	1,25	Verzinkt	12	120			12x1	120x1
31273000	IRVCIZ1-27183000-012			3000	27	18	1,25	Verzinkt	12	120				


Load values for the fixing rails

Uniform load




L (mm)	Fixing rail 27/18 F (N)
250	1 565
300	1 304
350	1 118
400	979
450	870
500	783
600	652
700	559
800	464
900	366
1000	297
1200	206
1400	152
1600	116

Load at 1 point

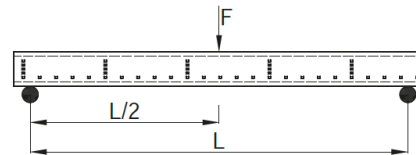


L (mm)	Fixing rail 27/18 F (N)
250	783
300	652
350	559
400	489
450	434
500	391
600	327
700	279
800	244
900	218
1000	186
1200	129

Equal concentrated loads at 2 points

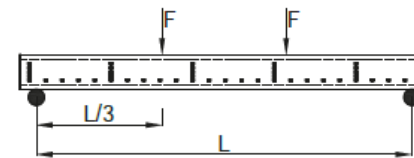

L (mm)	Fixing rail 27/18 F (N)
250	587
300	489
350	419
400	367
450	327
500	294
600	244
700	210
800	170
900	134


Equal concentrated loads at 3 points

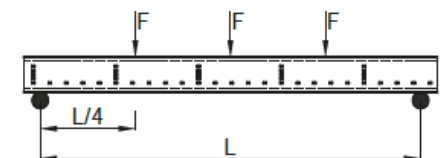

L (mm)	Fixing rail 27/18 F (N)
250	392
300	327
350	279
400	244
450	218
500	196
600	163
700	140
800	122

10 N = 1 kg

How to use :

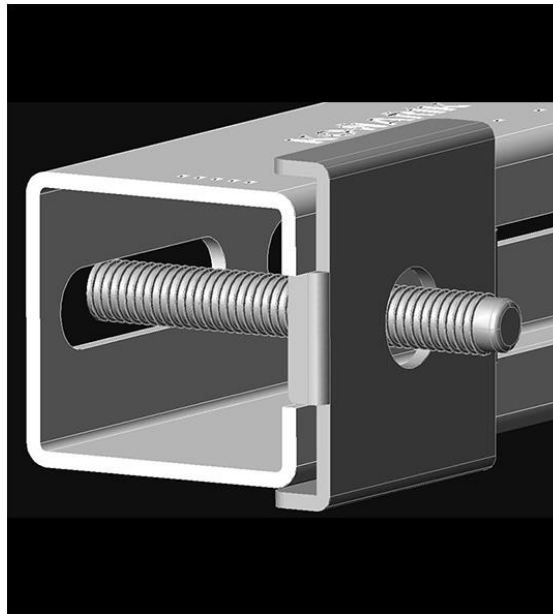


GEBRUIK DEZE BEVESTIGINGSMATERIALEN :



MONTAGESET



27/18+28/30



**Voor
M8**