



KOUDE BEUGEL
MET 25 MM PUR-ISOLATIE
VERZINKT

KOŇAŘÍK®
závěsová technika



DESCRIPTION:

The KX insulation clamp is used if the installed piping system needs to be skinned.

FIELDS:

Cooling and freezing technology

USE:

Steel pipes

Copper pipes

Stainless steel pipes

TECHNICAL DATA:

PUR substance(without FCKW):	density 80 kg/m ³
------------------------------	------------------------------

Use within temperature range:	from -50 °C to +105 °C
-------------------------------	------------------------

Use at temperature:	≥10 °C
---------------------	--------

Thermal conductivity:	0,039 W/mk
-----------------------	------------

Storage temperature	≥10 °C
---------------------	--------




Colour:	black
---------	-------

Building material class:	DIN 4102-B2 (flammable)
--------------------------	-------------------------

DIN 4102-B1 (not easily flammable)

Name	M Nut	Diameter of pipe	Supply. No	Insulation B (mm)	Package (pcs)
Insulating clamp KX-T	M8	10	46825010	25	1
Insulating clamp KX-T	M8	12	46825012	25	1
Insulating clamp KX-T	M8	15	46825015	25	1
Insulating clamp KX-T	M8	18	46825018	25	1
Insulating clamp KX-T	M8	22	46825022	25	1
Insulating clamp KX-T	M8/M10	28	46825028	25	1
Insulating clamp KX-T	M8/M10	35	46825035	25	1
Insulating clamp KX-T	M8/M10	42	46825042	25	1
Insulating clamp KX-T	M8/M10	48	46825048	25	1
Insulating clamp KX-T	M8/M10	54	46825054	25	1
Insulating clamp KX-T	M8/M10	57	46825057	25	1
Insulating clamp KX-T	M8/M10	60	46825060	25	1
Insulating clamp KX-T	M8/M10	64	46825064	25	1
Insulating clamp KX-T	M8/M10	70	46825070	25	1

Name	M Nut	Diameter of pipe	Supply. No	Insulation B (mm)	Package (pcs)
Insulating clamp KX-T	M8/M10	76	46825076	25	1
Insulating clamp KX-T	M8/M10	89	46825089	25	1
Insulating clamp KX-T	M8/M10	102	46825102	25	1
Insulating clamp KX-T	M8/M10	108	46825108	25	1
Insulating clamp KX-T	M8/M10	114	46825114	25	1
Insulating clamp KX-T	M12, M16, 1/2"	133	46825133	25	1
Insulating clamp KX-T	M12, M16, 1/2"	140	46825140	25	1
Insulating clamp KX-T	M12, M16, 1/2"	160	46825160	25	1
Insulating clamp KX-T	M12, M16, 1/2"	165	46825165	25	1
Insulating clamp KX-T	M12, M16, 1/2"	168	46825168	25	1
Insulating clamp KX-T	M12, M16, 1/2"	216	46825216	25	1
Insulating clamp KX-T	M12, M16, 1/2"	219	46825219	25	1
Insulating clamp KX-T	M12, M16, 1/2"	267	46825267	25	1
Insulating clamp KX-T	M12, M16, 1/2"	273	46825273	25	1

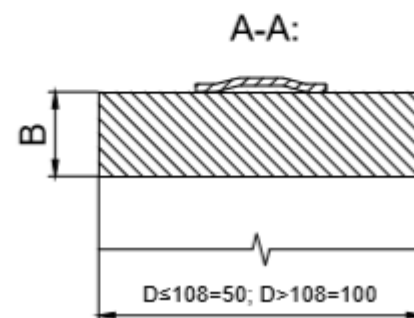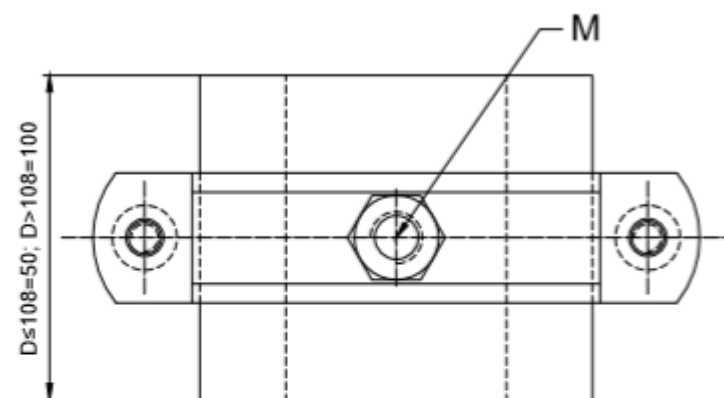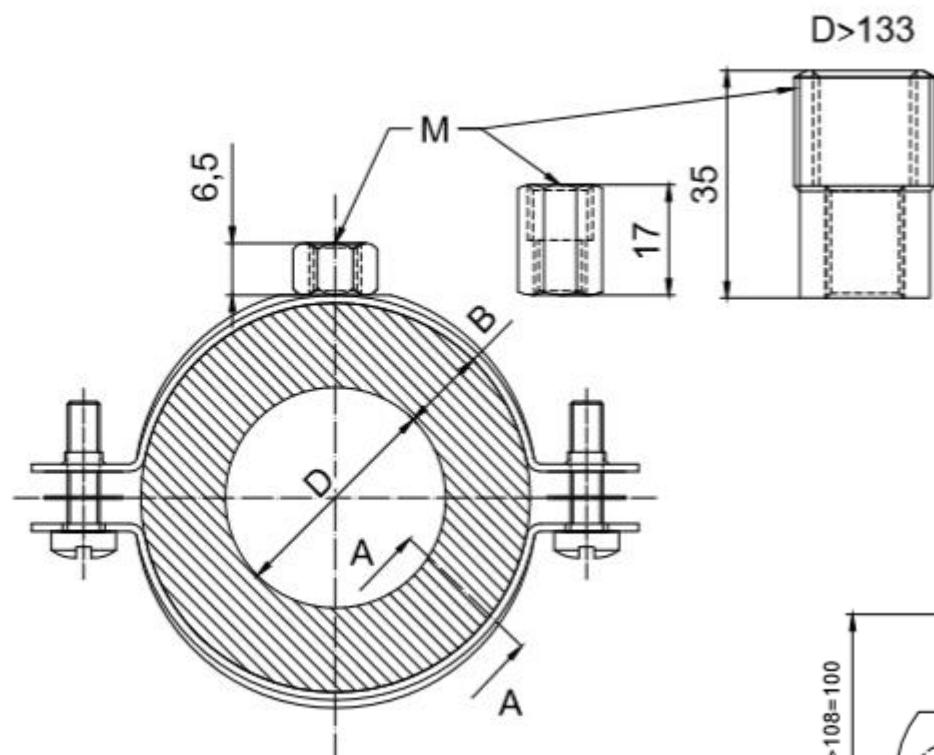

CROSS-REFERENCE TABEL :


Fabr. Partnr.	WT ARTIKELNUMMER			Type	Afmeting		Inhoud					
	Industrial pack Fabric pack	WT system Retail pack	WT system Small pack		Buis Ø	Isolatie Dikte	I-pack/pcs Pack	Carton			R-pack/pcs Pack	Carton
46825010	II25IZM-CZM10010-001	x	x	Koudebeugel KXT	10	25	50	500				
46825012	II25IZM-CZM10012-001	x	x	Koudebeugel KXT	12	25	50	500				
46825015	II25IZM-CZM10015-001	x	x	Koudebeugel KXT	15	25	50	500				
46825018	II25IZM-CZM10018-001	x	x	Koudebeugel KXT	18	25	50	500				
46825022	II25IZM-CZM10022-001	x	x	Koudebeugel KXT	22	25	50	500				
46825028	II25IZM-CZM10028-001	x	x	Koudebeugel KXT	28	25	50	500				
46825035	II25IZM-CZM10035-001	x	x	Koudebeugel KXT	35	25	50	500				
46825042	II25IZM-CZM10042-001	x	x	Koudebeugel KXT	42	25	50	500				
46825048	II25IZM-CZM10048-001	x	x	Koudebeugel KXT	48	25	50	500				
46825054	II25IZM-CZM10054-001	x	x	Koudebeugel KXT	54	25	50	500				
46825057	II25IZM-CZM10057-001	x	x	Koudebeugel KXT	57	25	50	500				
46825060	II25IZM-CZM10060-001	x	x	Koudebeugel KXT	60	25	50	500				
46825064	II25IZM-CZM10064-001	x	x	Koudebeugel KXT	64	25	50	500				
46825070	II25IZM-CZM10070-001	x	x	Koudebeugel KXT	70	25	50	500				
46825076	II25IZM-CZM10076-001	x	x	Koudebeugel KXT	76	25	25	250				
46825089	II25IZM-CZM10089-001	x	x	Koudebeugel KXT	89	25	25	250				
46825102	II25IZM-CZM10102-001	x	x	Koudebeugel KXT	102	25	25	250				
46825108	II25IZM-CZM10108-001	x	x	Koudebeugel KXT	108	25	25	250				
46825114	II25IZM-CZM10114-001	x	x	Koudebeugel KXT	114	25	25	250				
46825133	II25IZM-CZM10133-001	x	x	Koudebeugel KXT	133	25	10	100				
46825140	II25IZM-CZM10140-001	x	x	Koudebeugel KXT	140	25	10	100				
46825160	II25IZM-CZM10160-001	x	x	Koudebeugel KXT	160	25	10	100				
46825165	II25IZM-CZM10165-001	x	x	Koudebeugel KXT	165	25	10	100				
46825168	II25IZM-CZM10168-001	x	x	Koudebeugel KXT	168	25	10	100				
46825216	II25IZM-CZM10216-001	x	x	Koudebeugel KXT	216	25	5	50				
46825219	II25IZM-CZM10219-001	x	x	Koudebeugel KXT	219	25	5	50				
46825267	II25IZM-CZM10267-001	x	x	Koudebeugel KXT	267	25	5	50				
46825273	II25IZM-CZM10273-001	x	x	Koudebeugel KXT	273	25	5	50				

HOW TO USE :


1. Open the pipe hanger and place it upon



2. Apply glue upon the bearing area of the hanger(incl. the gutter).

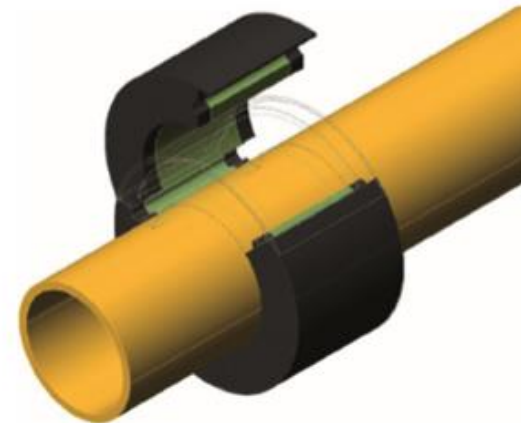

3. Press the hanger firmly against the pipe, remove adhesive tape and press firmly again (incl. the black PVC foil).

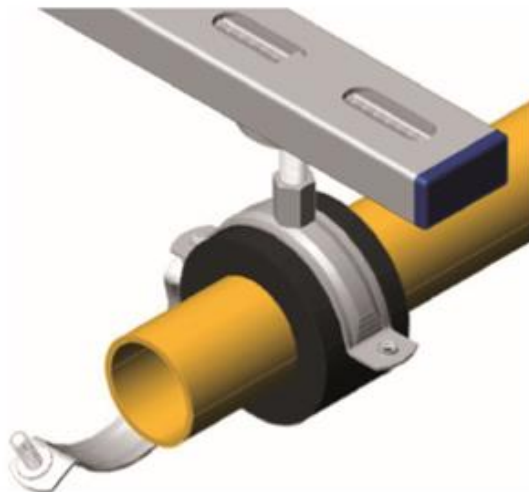

4. Mount a pipe clamp or a support upon the hanger.

